
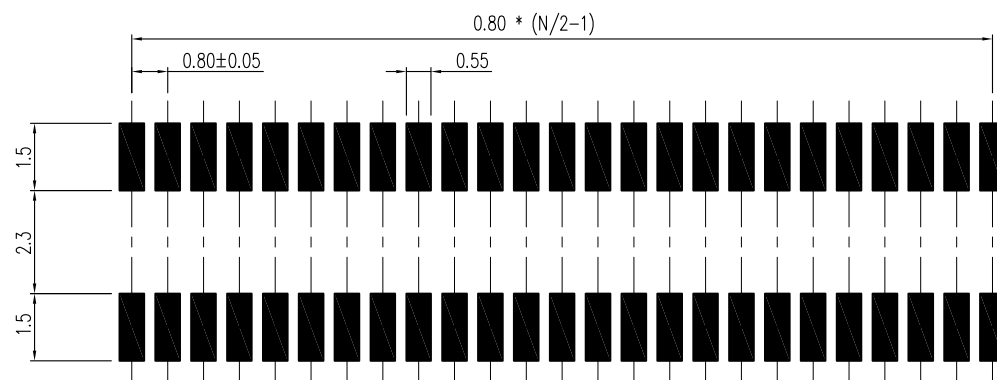



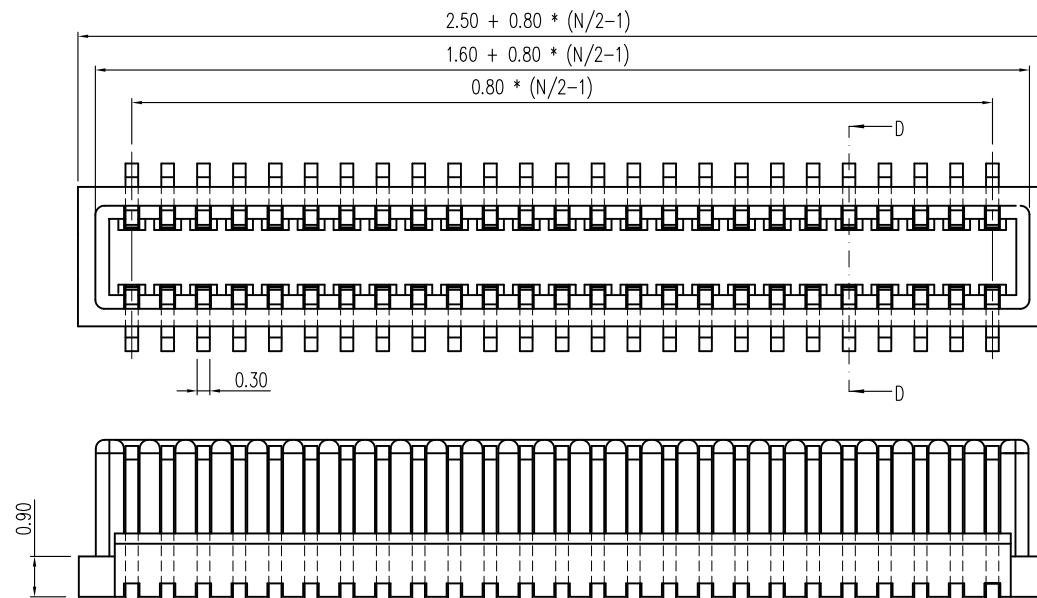

PCB Layout For
Surface Mounting

critical:

1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40m Ω max.
4. Dielectric Withstanding Voltage :
500V AC / 1 min.
5. Insulation Resistance : 100M Ω min.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP08-S090X-xxx-LF

SERIES

LEAD FREE

010~100WAY

NON POST

UNMATED HIGH/ 0.95mm

FEMALE

DESCRIPTION: 0.80mm (0.031") Pitch Board To Board Male connector H = 3.55mm(N0 BOSS)