



DIM.A = 0.80 * No. of Spaces

DIM.B = DIM.A + 5.0

DIM.C = DIM.A + 1.6

DIM.D = DIM.A + 4.0

* Available in 10,12,14,16,20,24,26,
30,34,36,40,50,60,80 circuits

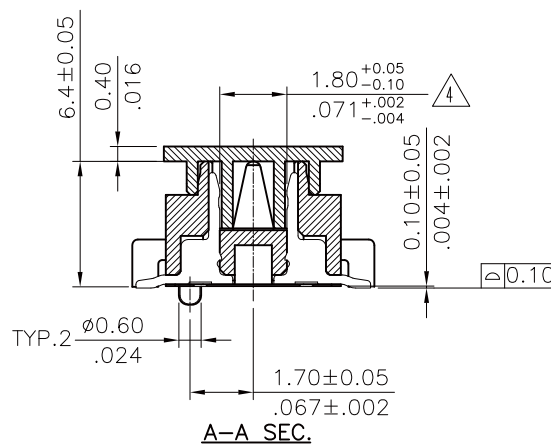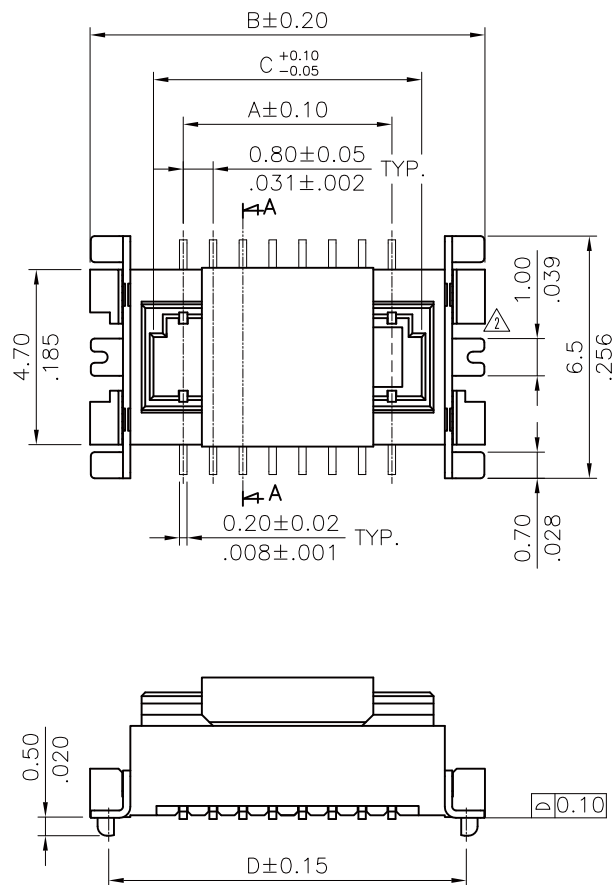

Note:

1. Material:

* Insulation:


Nylon 6T + 30% G.F. UL94V-0
Color Nature(Halogen-Free)

* Contact: Brass, t=0.2mm

* Fixed tab: Brass, With Gold Flash,
t=0.2mm

* PAD: Nylon 6T + 30% G.F. UL94V-0
(Halogen-Free)

2. For Lead Free IR Reflow Process

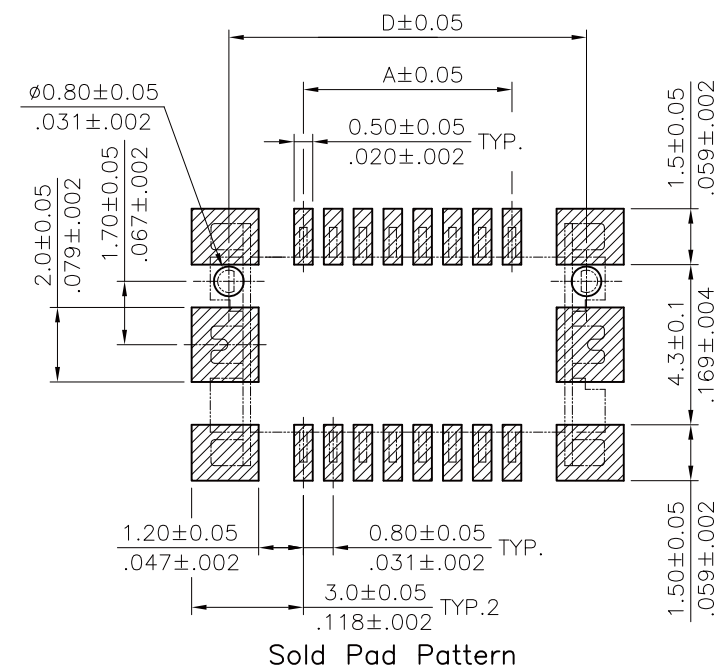

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

NP0818-P64PCR-xxx-LF

SERIES

MALE

REEL

CAP

POST

UNMATED

010~080

WAY

HIGH

6.4mm

LEADFREE

DESCRIPTION:

