

DIM.A = 0.80 * No. of Spaces

DIM.B = DIM.A + 5.0




DIM.C = DIM.A + 2.34

DIM.D = DIM.A + 4.0

* Available in 10,12,14,16,20,24,26,
30,34,36,40,50,60,80 circuits

Material:

- * Insulation:
Nylon 6T + 30% G.F. UL94V-0
Color Nature
- * Contact: Phosphor Bronze, t=0.2mm
- * Fixed tab: Brass, With Gold Flash, t=0.2mm

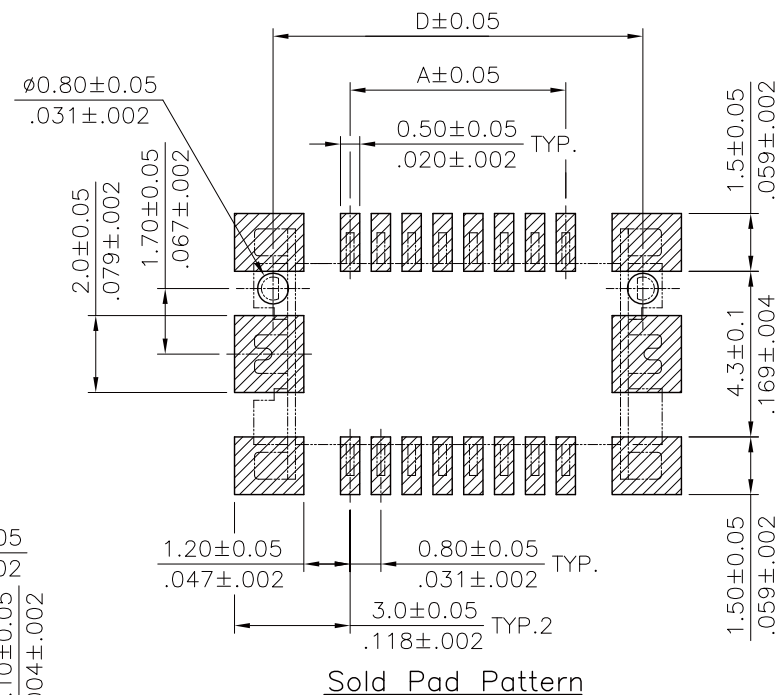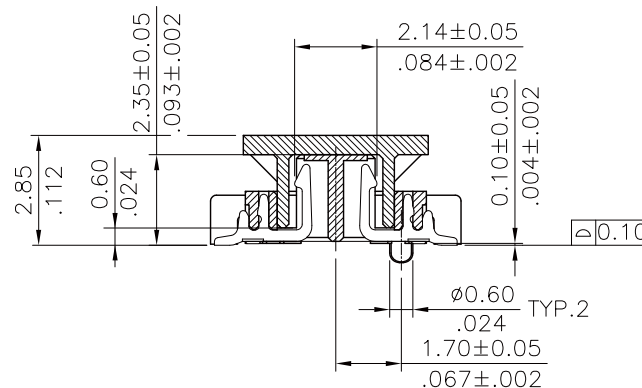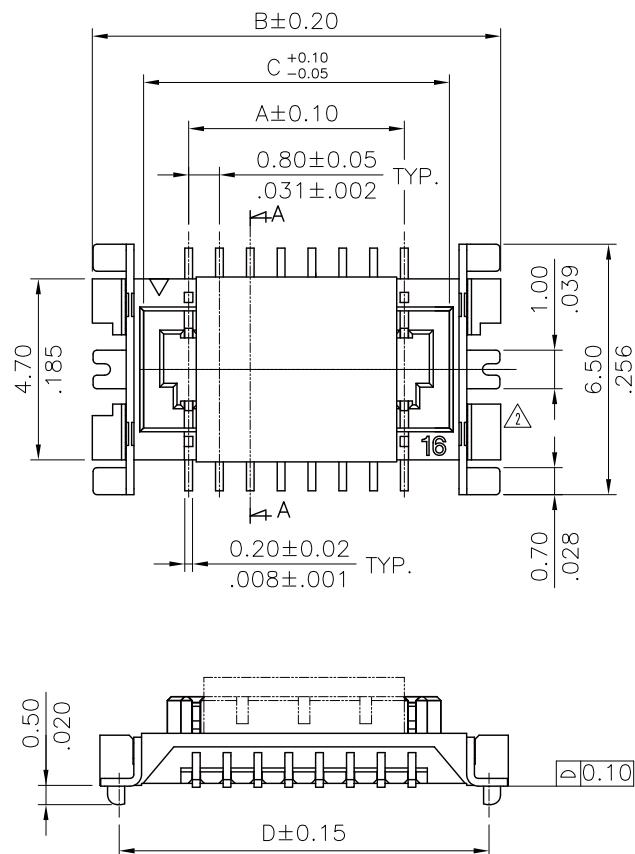

A-A SEC.

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

ORDER INFORMATION

NP0818-S06PCR-xxx-LF

SERIES

MALE

REEL

CAP

POST

UNMATED

LEADFREE

010~080 WAY

HIGH 0.6mm

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

