
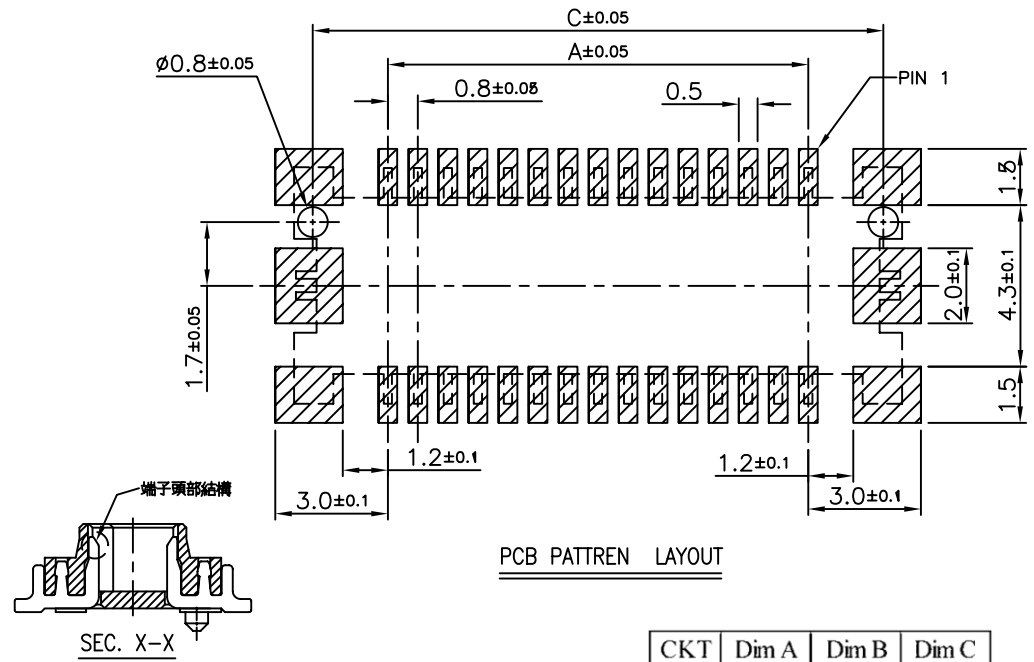



NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,
UL94V-0;
1.2 CONTACT: COPPER ALLOY
1.3 FITTING NAIL: COPPER ALLOY
1.4 COVER: THERMOPLASTIC, HIGH TEMP UL94V-0
2. REFLOW SOLDER CAPABLE TO 260° C

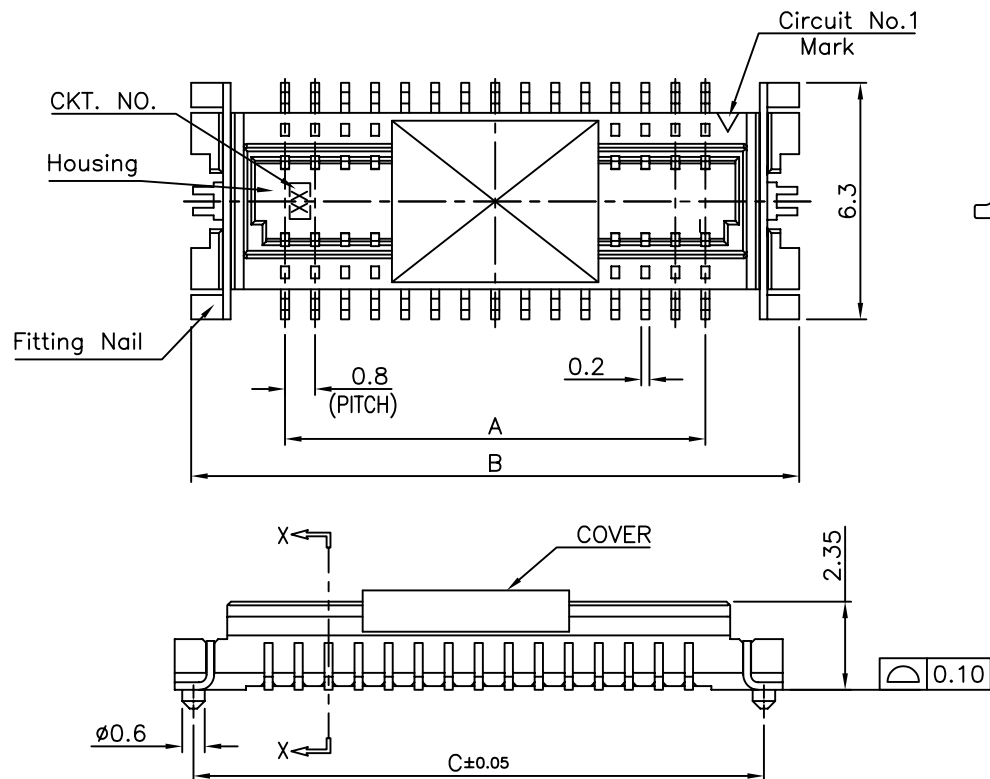

CKT	Dim A	Dim B	Dim C
10	3.2	8.2	7.2
12	4.0	9.0	8.0
14	4.8	9.8	8.8
16	5.6	10.6	9.6
20	7.2	12.2	11.2
24	8.8	13.8	12.8
26	9.6	14.6	13.6
30	11.2	16.2	15.2
34	12.8	17.8	16.8
36	13.6	18.6	17.6
40	15.2	20.2	19.2
50	19.2	24.2	23.2
60	23.2	28.2	27.2
80	31.2	36.2	35.2

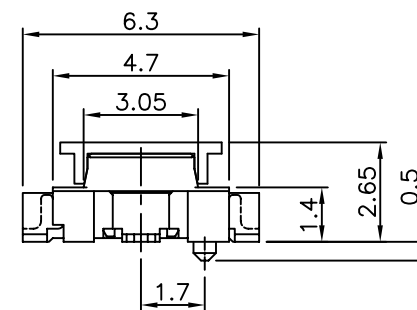

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
X. ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

NP0821-P15EP2C-xxx-LF

SERIES

MALE

EAR

POST

CAP

UNMATED

HIGH 1.50mm

LEADFREE

010~080WAY

DESCRIPTION: 0.8mm BTB D/R CONN. SMT S/T TYPE