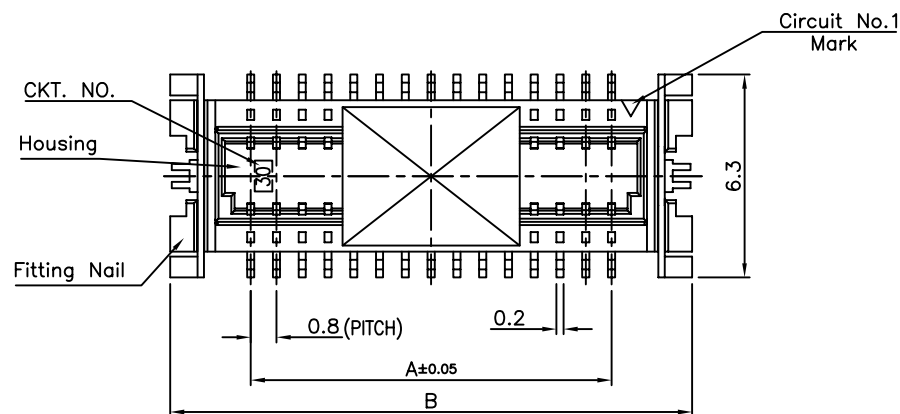
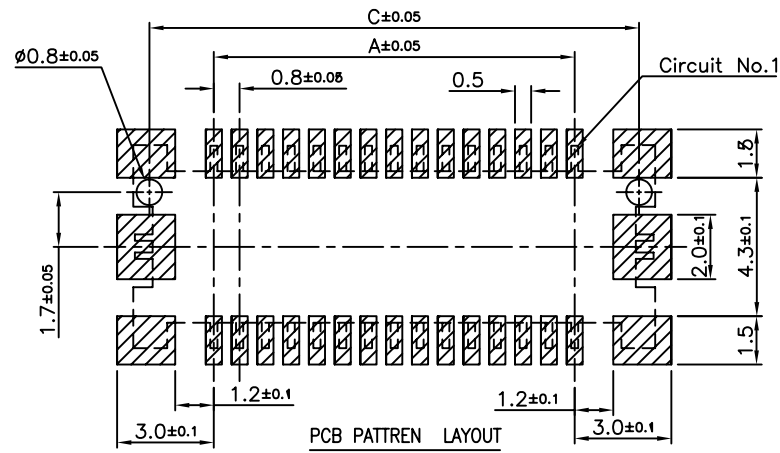


- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0;
 - CONTACT: COPPER ALLOY
 - FITTING NAIL: COPPER ALLOR
 - COVER: THERMOPLASTIC,HIGH TEMP UL94V-0
 - FINISH:
 - CONTACT: PLS SEE ACES PLATING CODE(P/N LEGEND)
 - FITTING NAIL: PLS SEE ACES PLATING CODE(P/N LEGEND)
 - REFLOW SOLDER CAPABLE TO 260° C

CKT	Dim A	Dim B	Dim C
10	3.2	8.2	7.2
12	4.0	9.0	8.0
14	4.8	9.8	8.8
16	5.6	10.6	9.6
20	7.2	12.2	11.2
24	8.8	13.8	12.8
26	9.6	14.6	13.6
30	11.2	16.2	15.2
34	12.8	17.8	16.8
36	13.6	18.6	17.6
40	15.2	20.2	19.2
50	19.2	24.2	23.2
60	23.2	28.2	27.2
80	31.2	36.2	35.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

NP0821-P23EP2C-xxx-LF

SERIES

MALE

EAR+POST

UNMATED

HIGH

LEADFREE

010~080WAY

CAP

2.35mm

DESCRIPTION: 0.8mm BTB D/R CONN. SMT S/T TYPE