
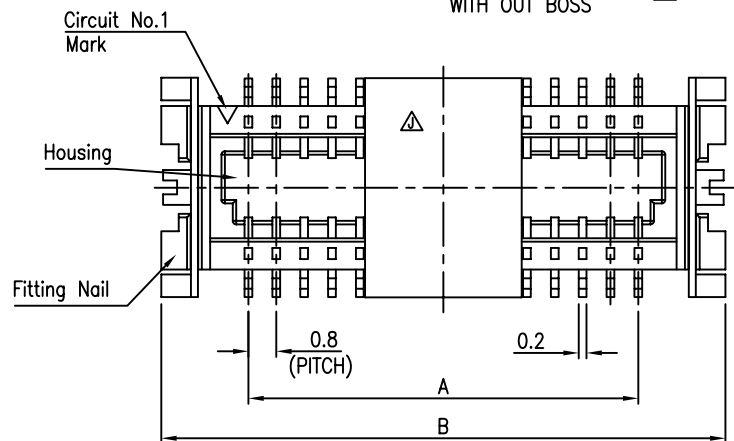
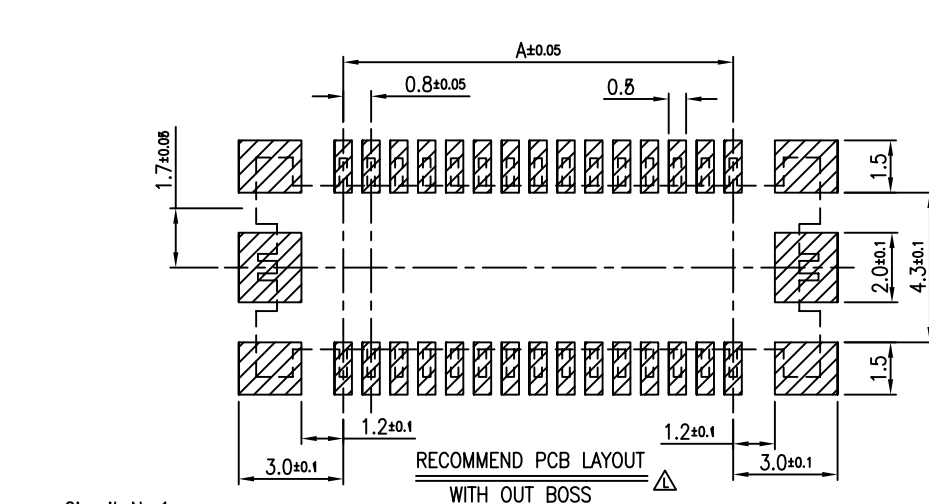
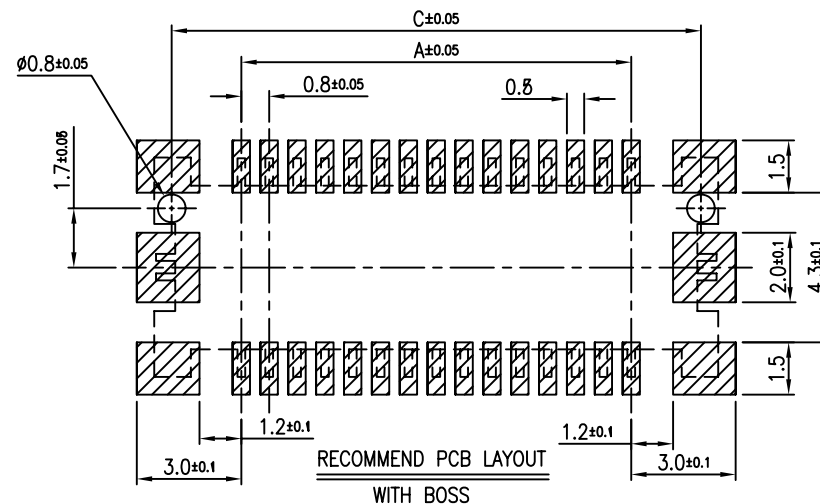


NOTES:

1. MATERIAL:
 - HOUSING: HIGH TEMP THERMOPLASTIC, UL94V-0.
 - CONTACT: COPPER ALLOY
2. PLATING:
 - 1: 50u" NICKEL UNDER PLATED OVER ALL.
 - GOLD PLATING ON CONTACT,
 - N: 50u" NICKEL UNDER PLATED OVER ALL.
 - 120u" MIN. MATT TIN OVER ALL.
 - B: GOLD FLASH PLATING OVERALL,
 - 5u" GOLD PLATING ON CONTACT AREA.
 - FITTING NAIL: COPPER ALLOY
3. PLATING:
 - 1: 50u" NICKEL UNDER PLATED OVER ALL.
 - GOLD PLATING ON CONTACT,
 - N: 50u" NICKEL UNDER PLATED OVER ALL.
 - 120u" MIN. MATT TIN OVER ALL.
4. REFLOW SOLDER CAPABLE TO 260°C

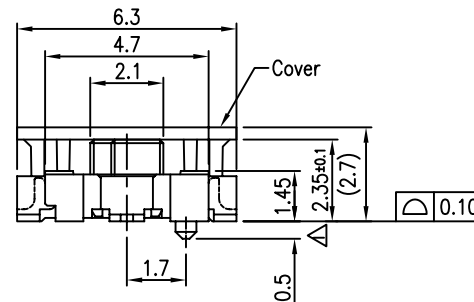

CKT	Dim A	Dim B	Dim C
10	3.2	8.2	7.2
12	4.0	9.0	8.0
14	4.8	9.8	8.8
16	5.6	10.6	9.6
20	7.2	12.2	11.2
24	8.8	13.8	12.8
26	9.6	14.6	13.6
30	11.2	16.2	15.2
34	12.8	17.8	16.8
36	13.6	18.6	17.6
40	15.2	20.2	19.2
50	19.2	24.2	23.2
60	23.2	28.2	27.2
80	31.2	36.2	35.2
90	35.2	40.2	39.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X ± 0.50
X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

NP0821-S15EP2C-xxx-LF

SERIES

FEMALE

EAR

UNMATED

POST

CAP

010~090WAY

LEADFREE

UNMATED HIGH 1.50mm

DESCRIPTION: 0.8mm BTB D/R Rept. SMT S/T TYPE