
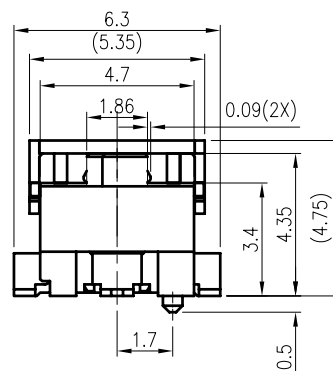
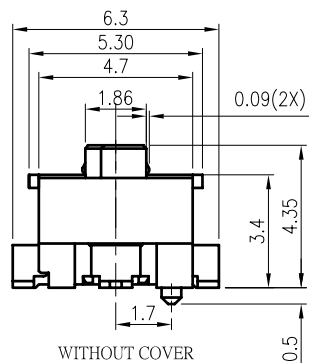
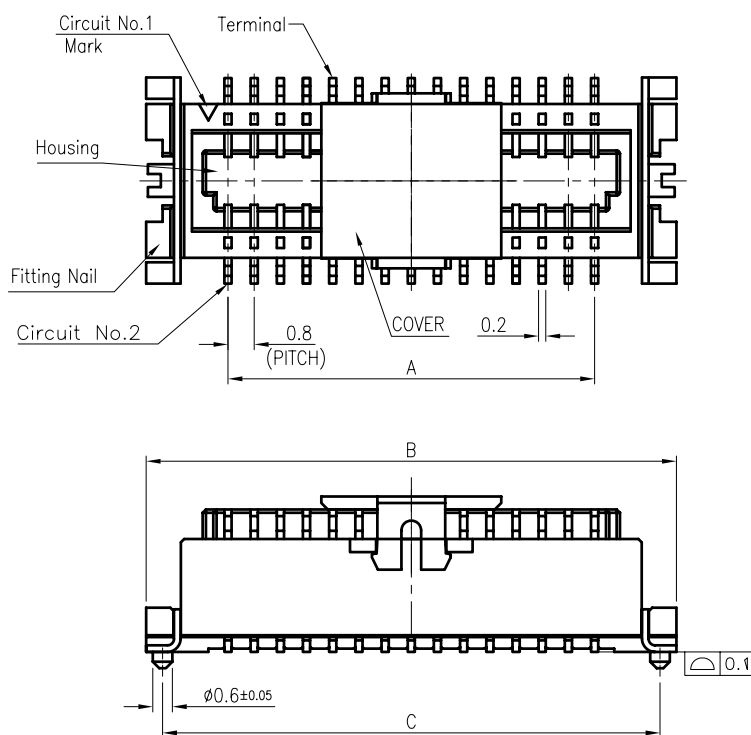


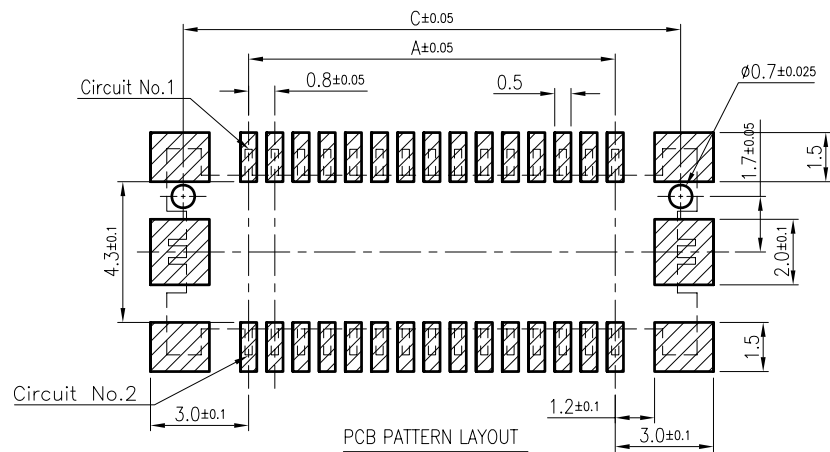

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,
UL94V-0; COLOR:BLACK.

1.2 CONTACT: COPPER ALLOY

1.3 FITTING NAIL: COPPER ALLOY

2. FINISH:

2.1 CONTACT:50~100u" NICKEL UNDERPLATING OVERALL.

1:1u"~3u"GOLD PLATING OVERALL.

N:80u"~120u" MATT TIN OVERALL,

2.2 FITTING NAIL:50~100u" NICKEL UNDERPLATING OVERALL.

1:GOLD FLASH PLATING OVERALL.

N:80u"~120u" MATT TIN OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C

CKT	Dim A	Dim B	Dim C
80	31.2	36.2	35.2
90	35.2	40.2	39.2
100	39.2	44.2	43.2

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

.XXX ± 0.10

DATE

ANG ± 2°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

NP0821-S34EPC-xxx-LF

SERIES

LEADFREE

010~100WAY

FEMALE

EAR+POST





UNMATED HIGH 3.4mm

DESCRIPTION: 0.8mm BTB D/R RCPT. SMT S/T TYPE

MORETHANALL
Cable CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

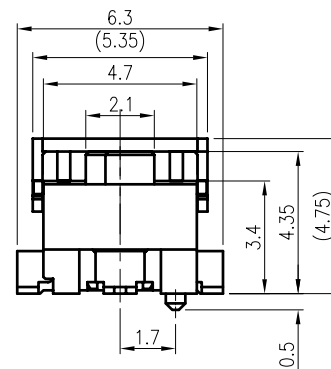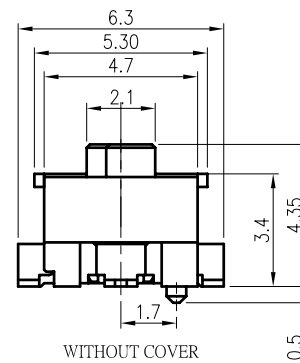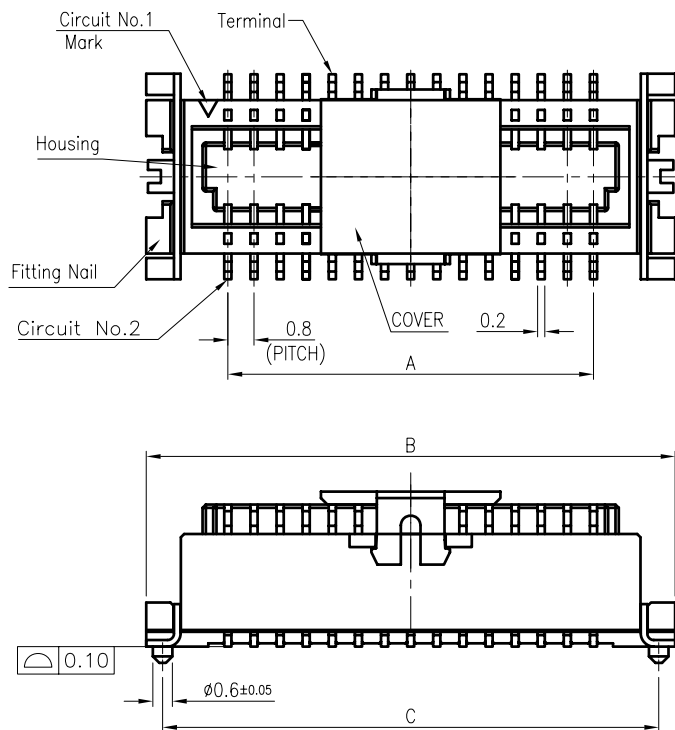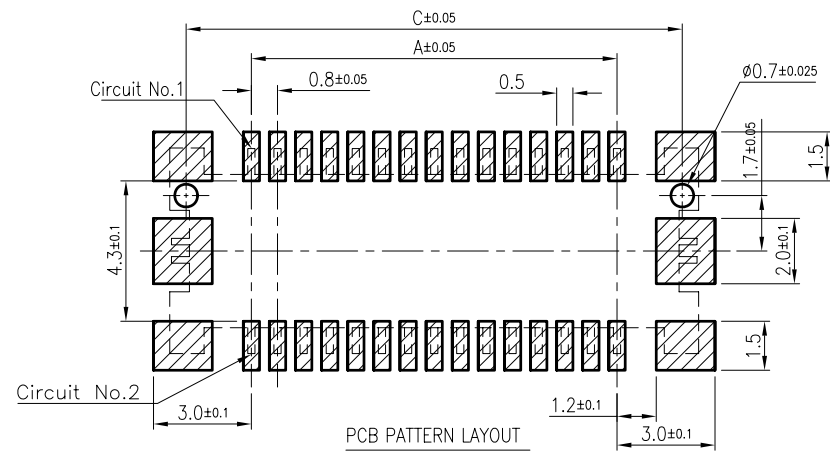

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,
UL94V-0; COLOR:BLACK.

1.2 CONTACT: COPPER ALLOY

1.3 FITTING NAIL: COPPER ALLOY

2. FINISH:

2.1 CONTACT:50~100u" NICKEL UNDERPLATING OVERALL.

1:1u"~3u" GOLD PLATING OVERALL.

N:80u"~120u" MATT TIN OVERALL,

2.2 FITTING NAIL:50~100u" NICKEL UNDERPLATING OVERALL.

1: GOLD FLASH PLATING OVERALL.

N:80u"~120u" MATT TIN OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C

CKT	Dim A	Dim B	Dim C
10	3.2	8.2	7.2
12	4.0	9.0	8.0
14	4.8	9.8	8.8
16	5.6	10.6	9.6
20	7.2	12.2	11.2
24	8.8	13.8	12.8
26	9.6	14.6	13.6
30	11.2	16.2	15.2
34	12.8	17.8	16.8
36	13.6	18.6	17.6
40	15.2	20.2	19.2
50	19.2	24.2	23.2
60	23.2	28.2	27.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

NP0821-S34EPC-xxx-LF

SERIES

FEMALE

LEADFREE

010~100WAY

CAP

EAR+POST

UNMATED HIGH 3.4mm

DESCRIPTION: 0.8mm BTB D/R RCPT. SMT S/T TYPE