

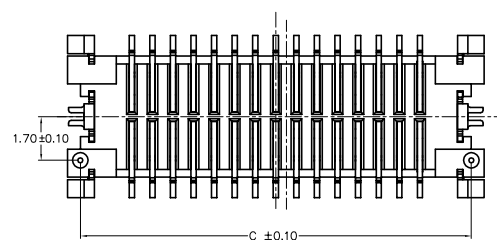
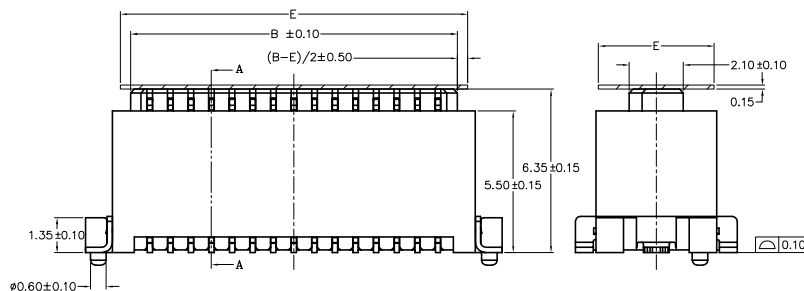
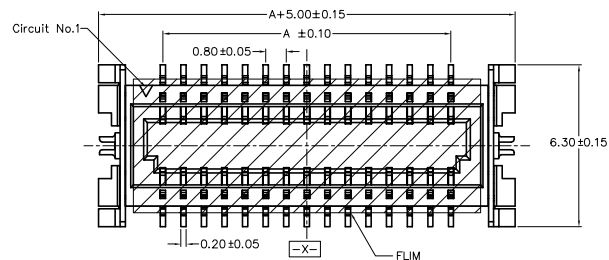


Diagram	Molding description
○	mass production & assemble mold
⊙	sample & assemble mold
⊕	mass production & fix mold
⊗	sample & fix mold



PIN數	FILM(E)
22PIN(含)以下	6.0X4.0
22PIN以上	13.5X4.5

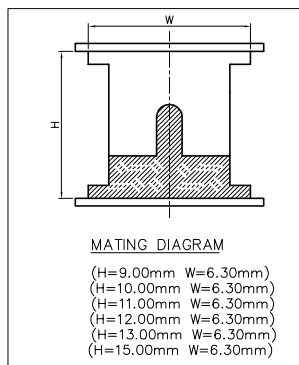


CIRCUITS	DIM.A	DIM.B	DIM.C	W/O PEG	WITH PEG
14	4.8	6.3	8.8		
16	5.6	7.1	9.6		
20	7.2	8.7	11.2	⊗	
22	8.0	9.50	12.0	⊕	
24	8.8	10.3	12.8		
30	11.2	12.7	15.2	⊕	
40	15.2	16.7	19.2	⊗	
50	19.2	20.7	23.2	⊕	
60	23.2	24.7	27.2	⊗	
80	31.2	32.7	35.2		
100	39.2	40.7	43.2	⊕	

SPECIFICATIONS

Current Rating:	0.5 Amps
Insulator resistance:	100 Megohms Min.
Contact resistance:	70 m ohm Max.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-40°C~+85°C
Contact Material:	Phosphor bronze
Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Color :	Natural
Finish:	Gold all over nickel

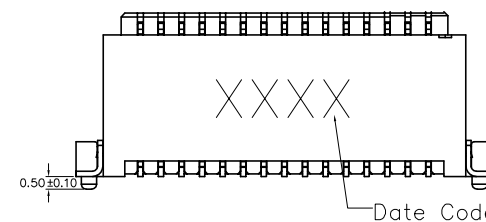

RECOMMENDED P.C.B LAYOUT (TOP VIEW) (PCB TOLERANCE:±0.05)

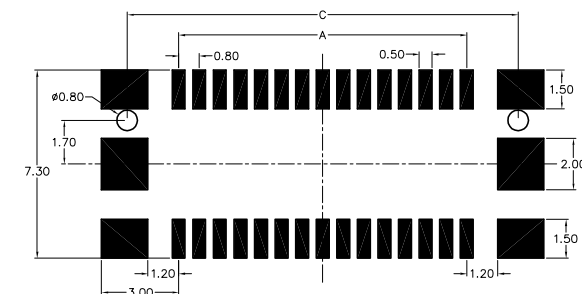

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X ± 0.50
X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

NP0821-S55EP2C-xxx-LF

SERIES

FEMALE

EAR

CAP POST

UNMATED HIGH 5.50mm

LEADFREE

014~100WAY

DESCRIPTION: