
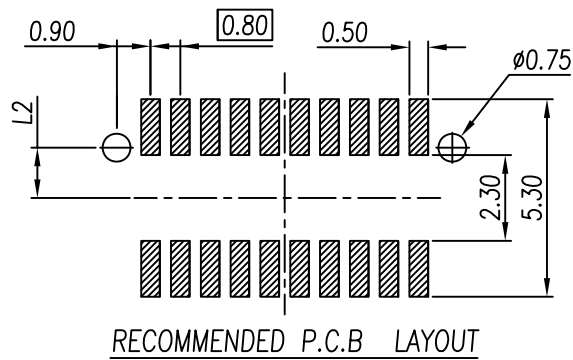


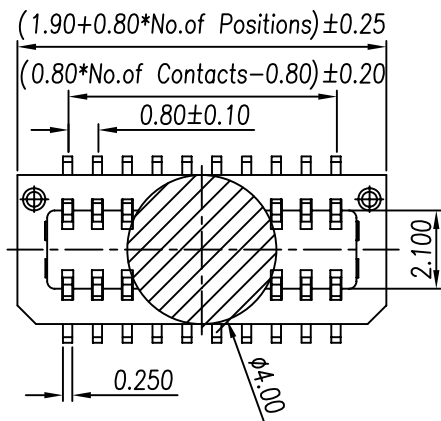

Specifications

Current Rating: 0.5Amp

Insulation Resistance: 500M Ω Min .

Dielectric Withstanding: 200V AC/DC




Contact Resistance: 20m Ω Max.

Operating Temperature:-40°C to +105°C

Materials

Contact Material: Phosphor Bronze

▲ Insulation Material: High Temperature Thermoplastic, UL 94V-0 Nylon9Tor the equivalent material

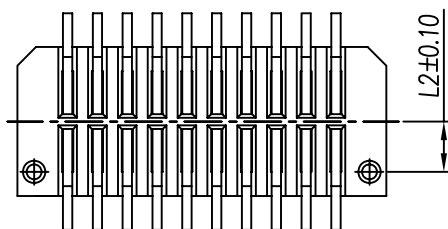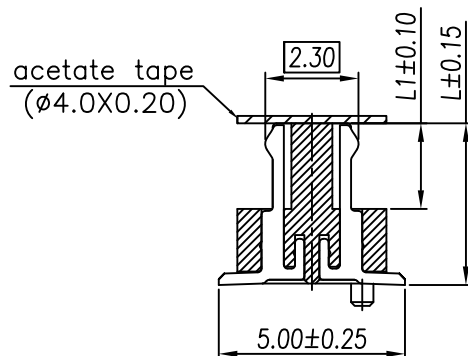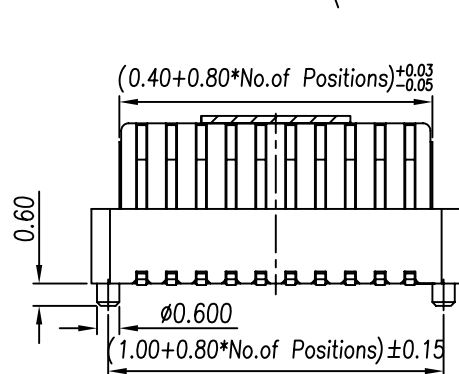

F/M ASSEM HEIGHT	L	L1	L2
4.00H (4~25pin) ▲	2.80	1.80	1.350
4.50H (4~25pin) ▲	3.30	1.80	1.350
5.00H (4~30pin) ▲	3.80	1.80	1.350
5.50H (4~25pin) ▲	4.30	2.30	1.350
6.00H (4~25pin) ▲	4.80	2.30	1.350
6.50H (4~25pin) ▲ 7.00H (4~25pin) ▲	5.30	2.30	1.350
	5.30	2.30	1.250▲

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.25
.X ± 0.20
.XX ± 0.13
.XXX ± 0.08
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP0824-SVxxxPC-xxx-LF

SERIES

FEMALE

LEADFREE
005~030 WAY

CAP
POST

L-L1
90°SMT

DESCRIPTION: 0.80 BOARD TO BOARD MALE ASSEMBLY

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com