

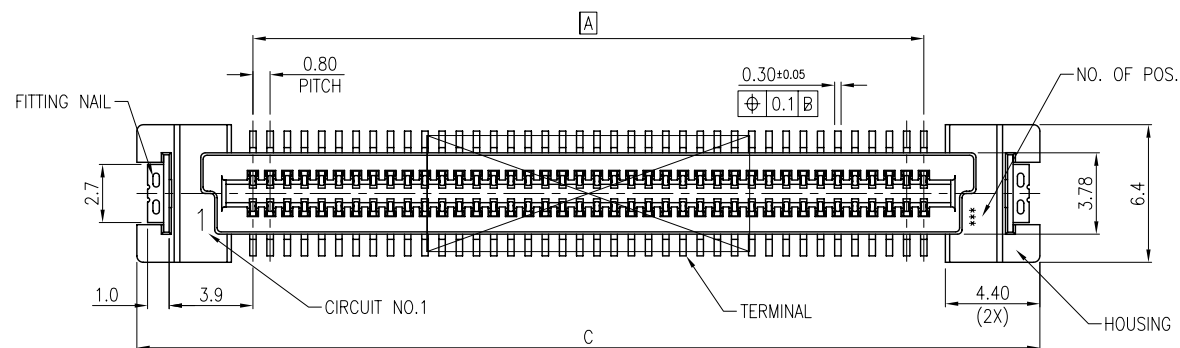
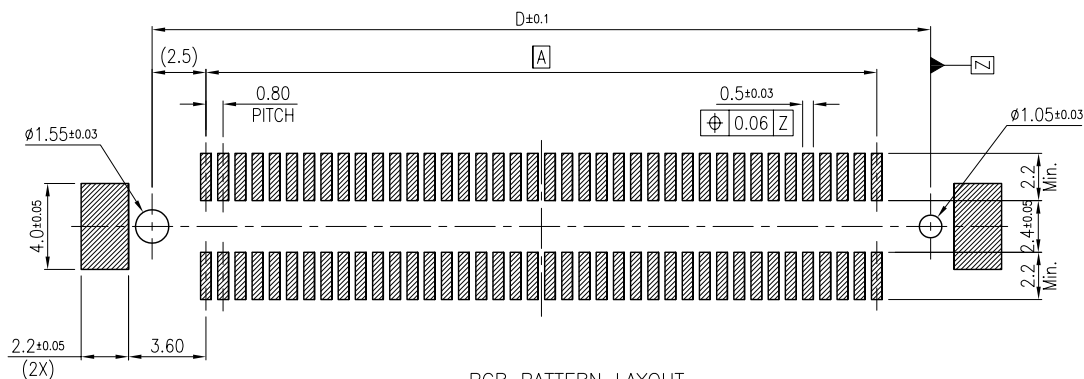





NOTES:

- 1.MATERIAL:
HOUSING:LCP UL94V-0
TERMINAL:COPPER ALLOY
FINISH:NICKEL OVER TIN-LEAD ON SOLDER TAIL
GOLD FLASH ON CONTACT AREA.
FITTING NAIL:COPPER ALLOY
FINISH:TIN PLATED
- 2.COPLANARITY 0.1 MM MAX. BASE ON DATUM A
- 3.TRUE POSITION 0.1 MM MAX. BASE ON DATUM B

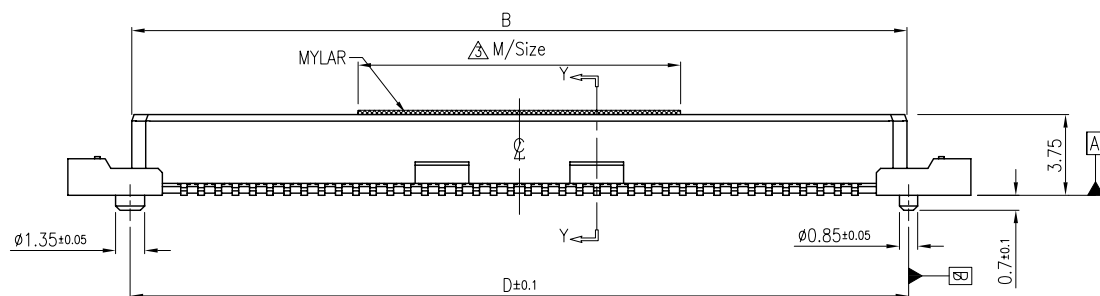

PCB PATTERN LAYOUT

CKT	Dim A	Dim B	Dim C	Dim D
40	15.2	20.05	26.0	20.2
60	23.2	28.05	34.0	28.2
80	31.2	36.05	42.0	36.2
100	39.2	44.05	50.0	44.2
120	47.2	52.05	58.0	52.2
140	55.2	60.05	66.0	60.2
160	63.2	68.05	74.0	68.2
180	71.2	76.05	82.0	76.2
200	79.2	84.05	90.0	84.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP08FH-S04AC-xxx-LF

SERIES

LEADFREE
040~200WAY

MYLAR

POST+EAR

UNMATED HIGH 0.4mm

MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 0.8mm BTB RCPT. SMT S/T D/R TYPE