
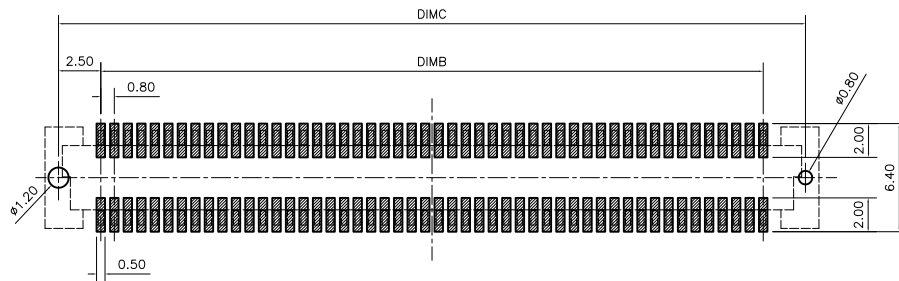



NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0.COLOR:NATURE
 - 1.2 CONTACT: COPPER ALLOY.
2. FINISH:
 - 2.1 CONTACT: 50~100u" NICKEL UNDERPLATING OVERALL.
 - P: 8u"MIN GOLD ON CONTACT AND GOLD FLASH ON SOLDEP
3. REFLOW SOLDER CAPABLE TO 260 °C



RECOMMEND PCB LAYOUT
TOLERANCE±0.05mm

CKT	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
40	21.80	15.20	20.20	18.80	20.15	17.8
60	29.80	23.20	28.20	26.80	28.15	25.8
100	45.80	39.20	44.20	42.80	44.15	41.8

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

PJECTION

照片框

ORDER INFORMATION

NP08FH-S05PC-xxx-LF

SERIES

LEADFREE
040.060.100WAY
CAP
POST
UNMATED HIGH 0.5mm
FEMALE

DESCRIPTION: 0.8 mm PITCH BTB RECPT CONN. SMT D/R S/T TYPE