





NOTES:

- 1.HUOSINGT: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.

MATING HEIGHT	4.0
FEMALE H1	1.40
FEMALE H2	2.05
MALE H1	1.85

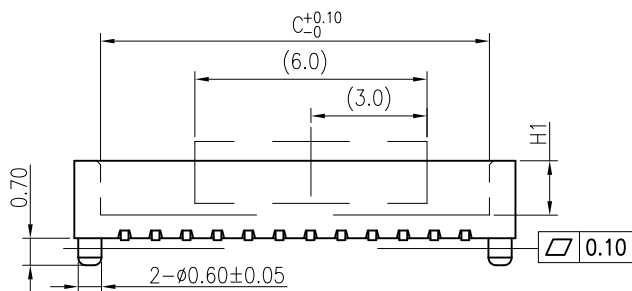

PIN	Dimensions				PIN	Dimensions			
	A	B	C	C		A	B	C	C
8 (2*4)	5.0	2.4	3.65	4.2	34 (2*17)	15.4	12.8	#####	14.6
10 (2*5)	5.8	3.2	4.45	5.0	36 (2*18)	16.2	13.6	#####	15.4
12 (2*6)	6.6	4.0	5.25	5.8	38 (2*19)	17.0	14.4	#####	16.2
14 (2*7)	7.4	4.8	6.05	6.6	40 (2*20)	17.8	15.2	#####	17.0
16 (2*8)	8.2	5.6	6.85	7.4	42 (2*21)	18.6	16.0	#####	17.8
18 (2*9)	9.0	6.4	7.65	8.2	44 (2*22)	19.4	16.8	#####	18.6
20 (2*10)	9.8	7.2	8.45	9.0	46 (2*23)	20.2	17.6	#####	19.4
22 (2*11)	10.6	8.0	9.25	9.8	48 (2*24)	21.0	18.4	#####	20.2
24 (2*12)	11.4	8.8	#####	10.6	50 (2*25)	21.8	19.2	#####	21.0
26 (2*13)	12.2	9.6	#####	11.4	52 (2*26)	22.6	20.0	#####	21.8
28 (2*14)	13.0	10.4	#####	12.2	54 (2*27)	23.4	20.8	#####	22.6
30 (2*15)	13.8	11.2	#####	13.0	56 (2*28)	24.2	21.6	#####	23.4
32 (2*16)	14.6	12.0	#####	13.8	58 (2*29)	25.0	22.4	#####	24.2
34 (2*17)	15.4	12.8	#####	14.6	60 (2*30)	25.8	23.2	#####	25.0

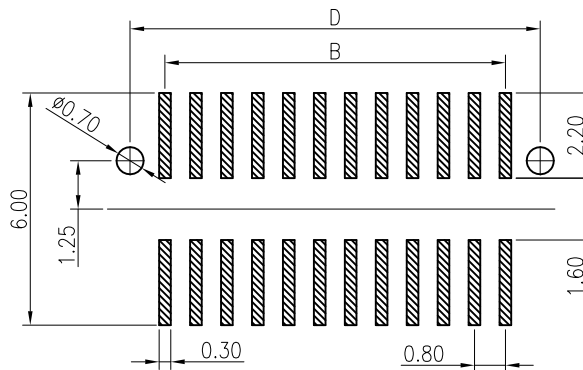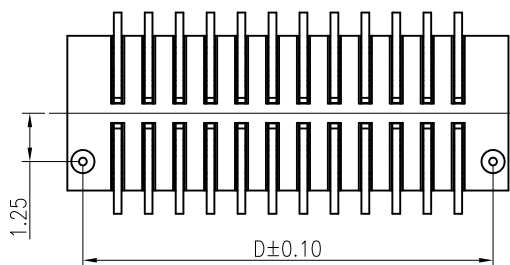

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

NP08K-S22P-xxx-LF

SERIES

LEADFREE

008-060WAY

POST

UNMATED HIGH 2.2mm

FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 0.8 BOARD TO BOARD SMT V/T TYPE FEMALE