

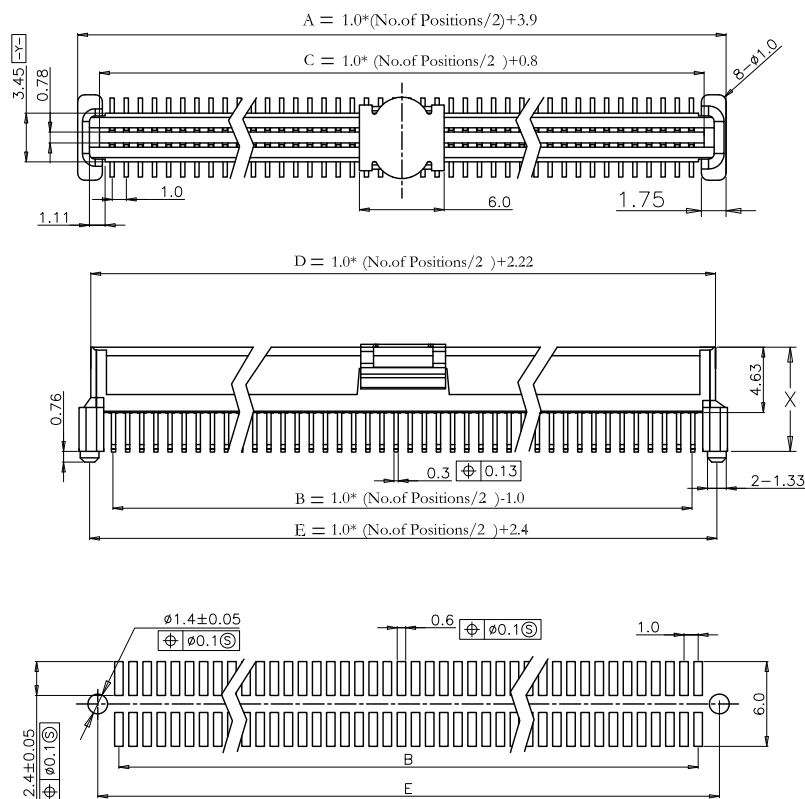
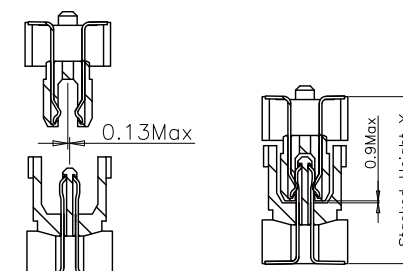




P.C.Board Layout

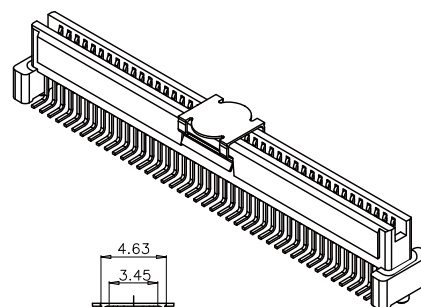

Material:

Housing: :High Temperature Plastic UL94V-0.

Contacts: Phosphor Bronze.

Pad: Metal.

Electrical Characteristics:

Current Rating: 0.5 AMP.

Dielectric Withstanding Voltage: AC 500V For 1 minute.

Insulator Resistance: 100M Ω min. at DC 100V.

Contact Resistance: 40m Ω max. at DC 1mA.

Operating Temperature: -40°C~+105°C .

***RoHS Compliant**

Position	14 Thru 100							
Dimension								
code:1~4 X	1	1	2	3	3	4	4	4
NP10-SxxxP	5.37	5.37	7.37	8.37	8.37	10.37	10.37	10.37
code:1~3 X	1	2	1	1	2	1	2	3
NP10-PxxxP	6.35	7.35	6.35	6.35	7.35	6.35	7.35	8.35
stacked height Y	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

NP10-SxxxPC-xxx-LF

SERIES | LEADFREE
SOCKET | 014~100WAY

STACK HIGH POST
080:8.0mm
150:15.0mm

DESCRIPTION: