


- NOTES:
1. UNLESS OTHERWISE SPECIFIED, ALL RADIUS ARE 0.5 MM.
 2. MATERIAL: NYLON 6T, 30% GLASS FIBER FILLED, UL94V-0 RATED, NATURAL COLOR.
 3. BURR: 0.08mm (MAX.)
 4. WARPAGE: 0.25mm (MAX.)
 5. PART SHOULD BE FREE OF VOIDS, SINKS, AND SHORTS.
 6. LOGO, MARKING, AND CAVITY NO. SHOULD BE CLEAR, AND THEIR HEIGHT SHOULD BE LOWER THAN THE SURFACE.

Recommended P.C.Board Layout

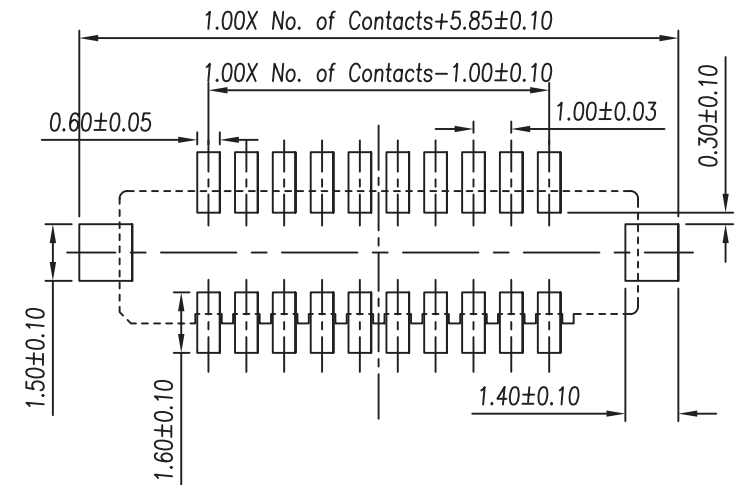

No. of Pins per Row
05~15

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

照片框

ORDER INFORMATION

NP1014-SV-xx-LF

SERIES | LEADFREE
| 05~15WAY
| 180°SMT
FEMALE

DESCRIPTION: 1.00 PITCH FEMALE BOARD TO BOARD SMT TYPE