


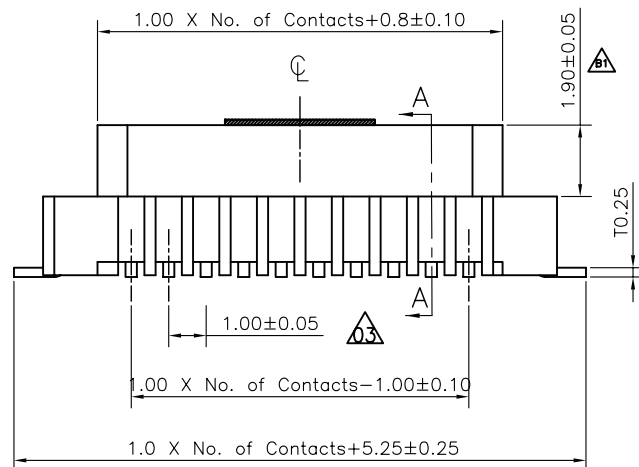


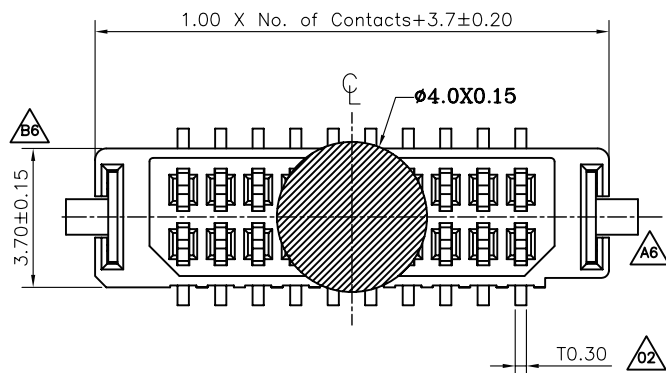

- NOTES:
1. UNLESS OTHERWISE SPECIFIED, ALL RADII ARE 0.5 MM.
 2. MATERIAL: High Temperature Thermoplastic, UL 94V-0 (Nylon) or the equivalent material, COLOR: BEIGE; T/FORK LOCK: Phosphor Bronze
 3. BURR: 0.08mm (MAX.)
 4. WARPAGE: 0.25mm (MAX.)
 5. LOGO, MARKING, AND CAVITY NO. SHOULD BE CLEAR, AND THEIR HEIGHT SHOULD BE LOWER THAN THE SURFACE.

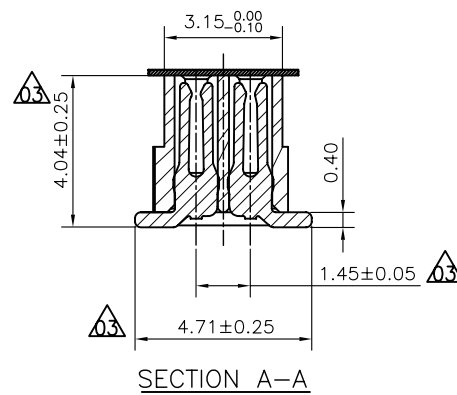

Recommended P.C.Board Layout

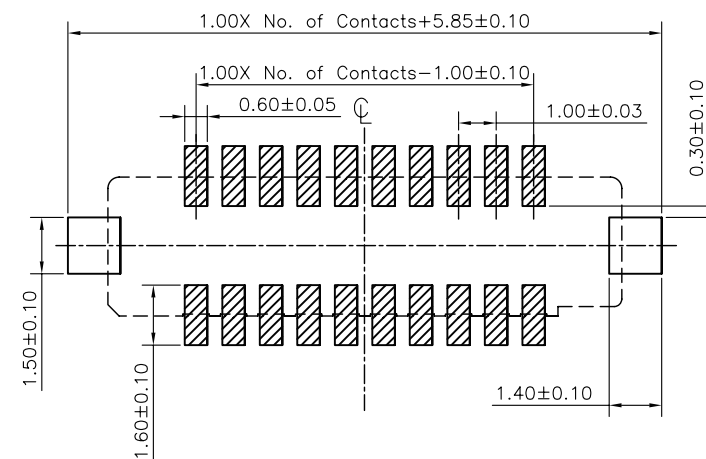

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP1014-SVC-xx-LF

SERIES

LEADFREE

05~15WAY

CAP

180°SMT

FEMALE

DESCRIPTION: 1.00 PITCH FEMALE BOARD TO BOARD TYPE