

3	HOLD DOWN	2	COPPER ALLOY/GOLD OVER NI
2	CONTACT	6	COPPER ALLOY/GOLD OVER NI
1	HOUSING	1	HIGH TEMP RESIN/UL 94V-0
ITEM	NAME	Q'TY	MATERIAL / FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.38

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.13

.XXX ± 0.05

DATE

ANG ±

照片框

ORDER INFORMATION

NP13-P01X-06-LF

SERIES | | | LEADFREE

60 WAY

NON POST

UNMATED HIGH 0.1mm

MALE


煜倫股份有限公司

www.morethanall.com

SIZE A4

PPOJECTION

DESCRIPTION: P1.3*H0.9mm BOARD TO BOARD CONN. PLUG

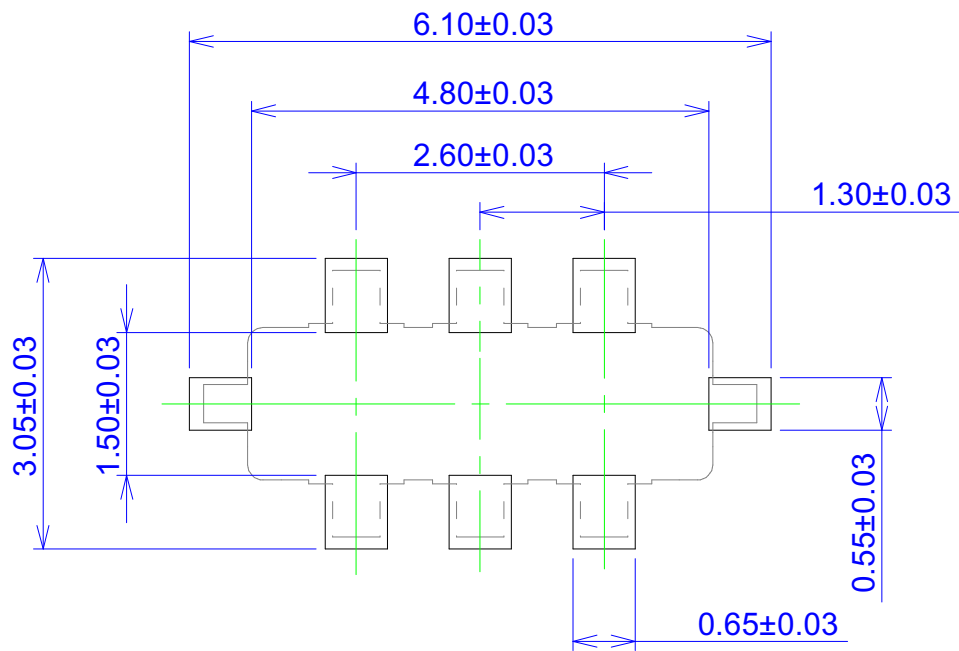

P.C. BOARD LAYOUT

NOTES:

- 1.0: RATING:
- 1.1: VOLTAGE: 30V AC/DC
- 1.2: CURRENT: 5 AMPS
- 1.3: OPERATION TEMPERATURE: -40° TO +85°
- 2.0: ELECTRICAL CHARACTERISTIC
- 2.1: CONTACT RESISTANCE: 20 mE MAX INITIAL
- 2.2: INSULATION RESISTANCE: 1000 ME MIN INITIAL
- 2.3: DIELECTIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- 3.0 All coplanarity is 0.08 mm Max.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.38

.X ± 0.25

.XX ± 0.13

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP13-P01X-06-LF

SERIES | LEADFREE

60 WAY

NON POST

UNMATED HIGH 0.1mm

MALE

DESCRIPTION: P1.3*H0.9mm BOARD TO BOARD CONN. PLUG