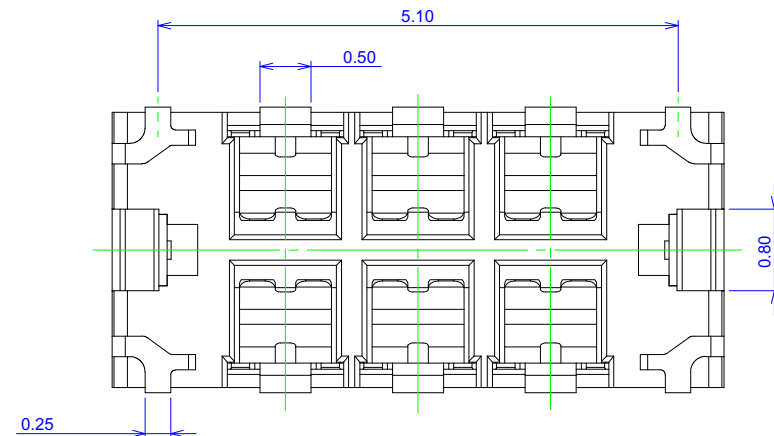

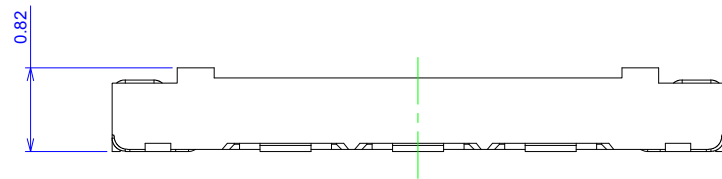
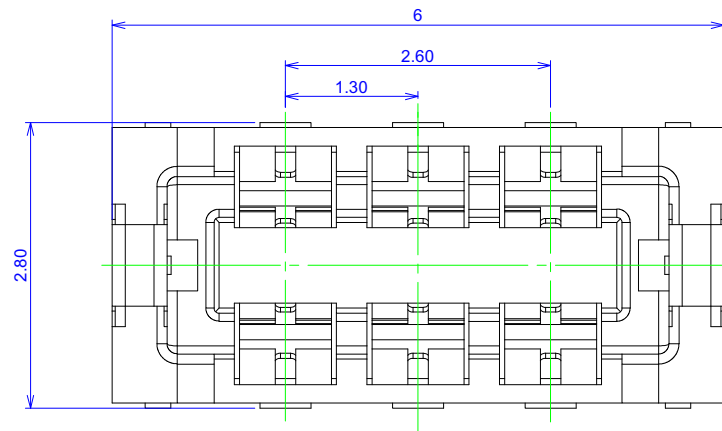


3	HOLD DOWN	2	COPPER ALLOY/GOLD OVER NI
2	CONTACT	6	COPPER ALLOY/GOLD OVER NI
1	HOUSING	1	HIGH TEMP RESIN/UL 94V-0
ITEM	NAME	Q'TY	MATERIAL / FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.38

.X, ± 0.25

.XX, ± 0.13

.XXX, ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP13-S08X-06-LF

SERIES LEADFREE


60 WAY

NON POST

UNMATED HIGH 0.8mm

FEMALE

DESCRIPTION: P1.30*H0.9mm BOARD TO BOARD CONN. RECEPTACLE

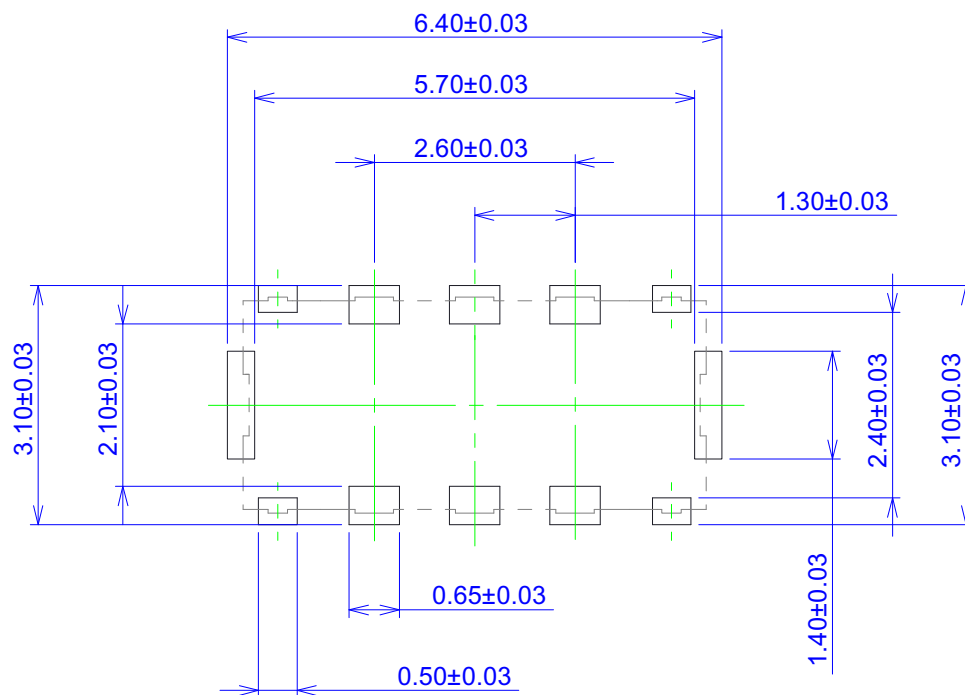

P.C. BOARD LAYOUT

NOTES:

1.0: RATING:

1.1: VOLTAGE: 30V AC/DC

1.2: CURRENT: 5 AMPS

1.3: OPERATION TEMPERATURE: -40° TO +85°

2.0: ELECTRICAL CHARACTERISTIC

2.1: CONTACT RESISTANCE: 20 mΩ MAX INITIAL

2.2: INSULATION RESISTANCE: 1000 MΩ MIN INITIAL

2.3: DIELECTIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE

3.0 All coplanarity is 0.08 mm Max.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.38

.X ± 0.25

.XX ± 0.13

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP13-S08X-06-LF

SERIES | LEADFREE

60 WAY

NON POST

UNMATED HIGH 0.8mm

FEMALE

DESCRIPTION: P1.30*H0.9mm BOARD TO BOARD CONN. RECEPTACLE