


Specifications
 Current Rating: 0.5Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon-9T

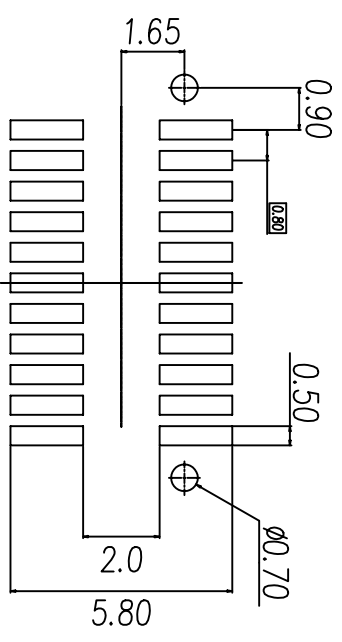

RECOMMENDED P.C. BOARD LAYOUT

MOORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫有限公司

PART NO. NPE-P34-022	
DWG NO. NPE-P34-022	FILE NO.
UNIT / mm	SCALE 1:1

CHECKED BY CY	PROJECTION
DRAWING BY	

TOLERANCES ARE
 X ± 0.38
 XX ± 0.25
 XXX ± 0.13
 AWG

DESCRIPTION:	0.8 BOARD TO BOARD MALE ASSEMBLY		
AREA	REVISIONS	HK	DATE