
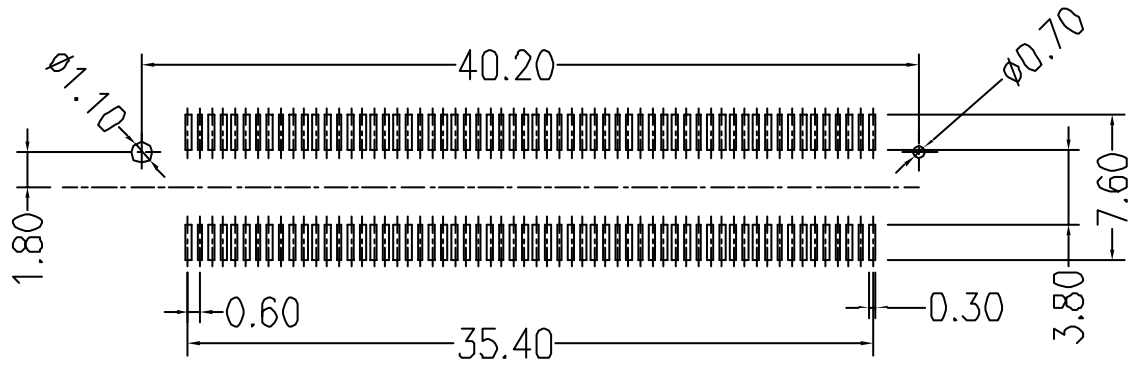
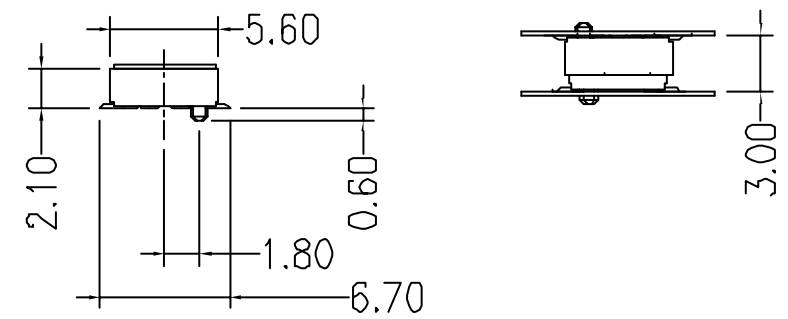


**SPECIFICATIONS**

- Current Rating: 0.3 Amps
- Insulator resistance: 100 Megohms min.
- Contact resistance: 60 m ohms max.
- Dielectric withstanding: AC 500V
- Operating Temperature: -40~+85°C
- Contact Material: Phosphor Bronze
- Insulator Material: High Temperature Thermoplastic, UL 94V-0

Finish: Gold plated  
 Ⓢ Standard: Gold flash all over

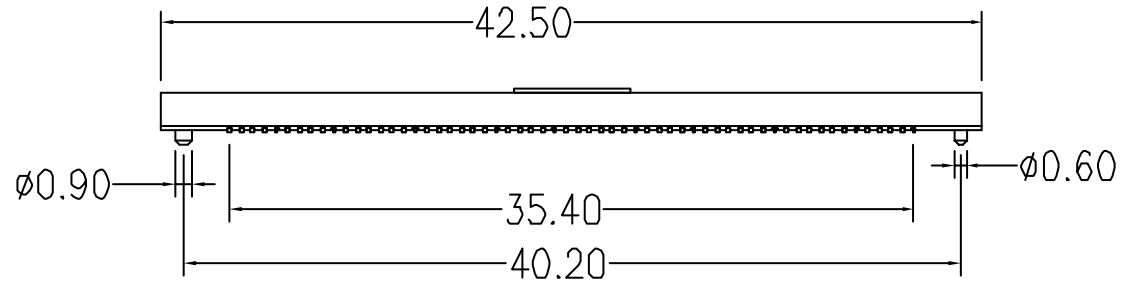

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)



PART NO. **NPH-S21PC-xxx**

DWG NO. **NPH-S21PC-xxx**

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

焯倫有限公司

FILE NO.

DRAWING BY

.X±  
.XX±  
.XXX±  
AWG

UNIT / mm

SCALE 1:1

PROJECTION

AREA

REVISIONS

HK

DATE