


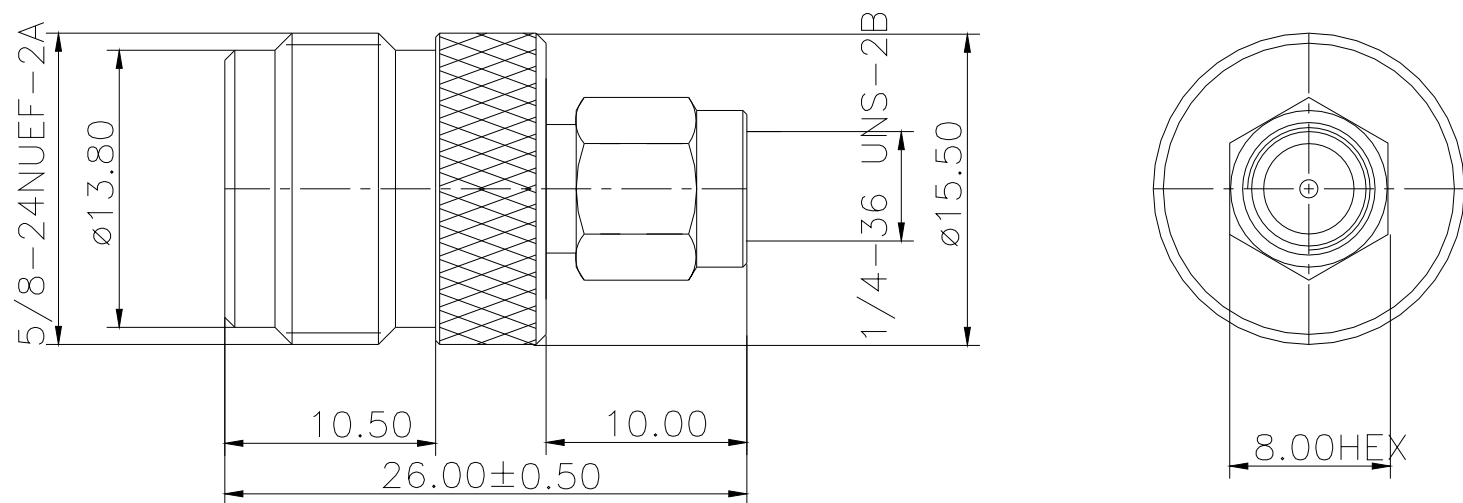

8	NUT	BRASS	1	GOLD PLATED
7	GASKET	SILICON	1	RED
6	SPRING	Be.Cu	1	NONE
5	BODY	BRASS	1	GOLD PLATED
4	INSULATOR	TEFLON	1	NATURAL
3	CENTER CONTACT	Be.Cu	1	GOLD PLATED
2	INSULATOR	TEFLON	1	NATURAL
1	BODY	BRASS	1	GOLD PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)
 BODY:GOLD PL. 1.5 MICROINCH MINIMUM
 CENTER CONTACT:GOLD PL. 3 MICROINCH MINIMUM

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

0.5-15 = ±0.15
 15-30 = ±0.30
 30-120 = ±0.60
 >120 = ±1.00

ANGLES
 ±3°

PPOJECTION

照片框

ORDER INFORMATION

NSMA-AS-50-LF

SERIES

LEADFREE

50 OHM

N FEMALE TO SMA MALE

DESCRIPTION: N FEMALE TO SMA MALE, 50ohm