


RECOMMENDED P.C.B LAYOUT

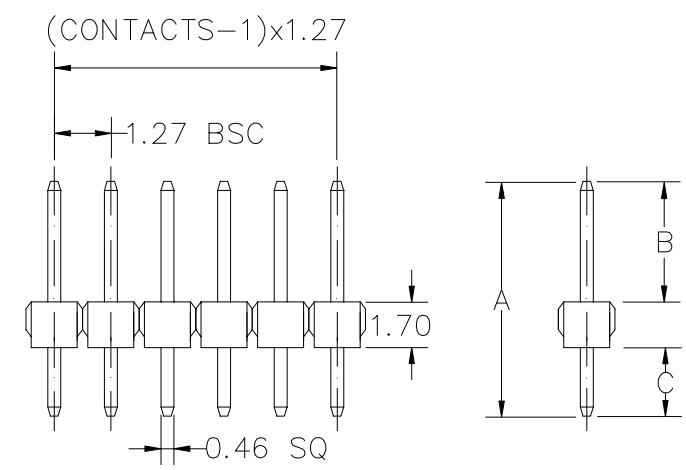

A: 8.20 mm B: 3.50 mm C: 3.00 mm

MATERIAL
HOUSING : THERMOPLASTIC UL94V-0
CONTACT : COPPER ALLOYS

SPECIFICATION
CURRENT: 1A
OPERATING TEMPERATURE: -45°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 5000 MEGAOHMS MIN
WITHSTANDING VOLTAGE : AC 500V RMS

P-D173530-1Xxx-LF
 LEADFREE

RoHS Compliant



PART NO. P-D173530-1Xxx

DWG NO. P-D173530-1Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
 .XX ± 0.1
 .XXX ±
 AWG

AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION