

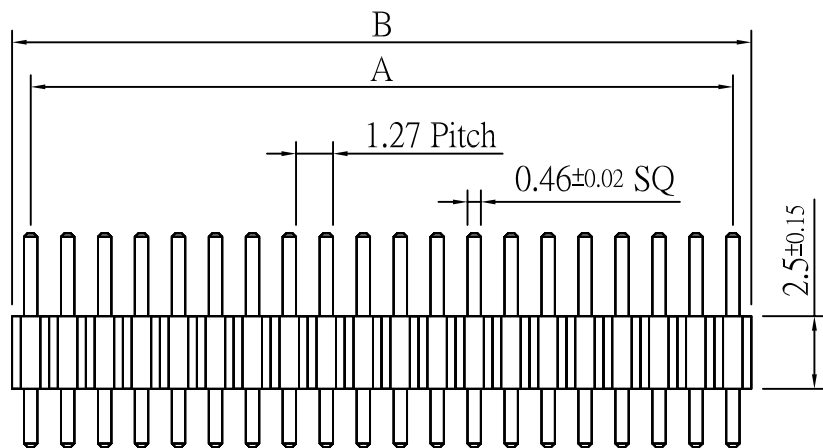



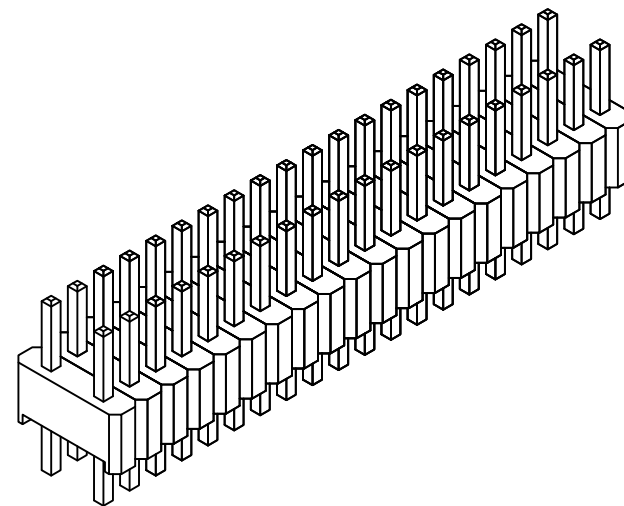

$$A = 1.27 * (\text{NO of Positions} - 1) \pm 0.15$$

$$B = A + 1.27 \pm 0.35$$

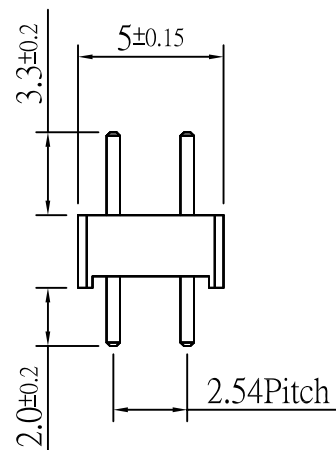

P.C.Board Layout

Contact:

Contact:Brass.

Insulator:Nylon 6T.

Finish:Gold flash plated over nickel.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

P-D253320-2Xxx-LF
SERIES
DIP180°
BASE2.5mm
LEADFREE
2X02:04WAY
2X50:100WAY
DIP 2.0mm
CONTACT3.3mm

DESCRIPTION: