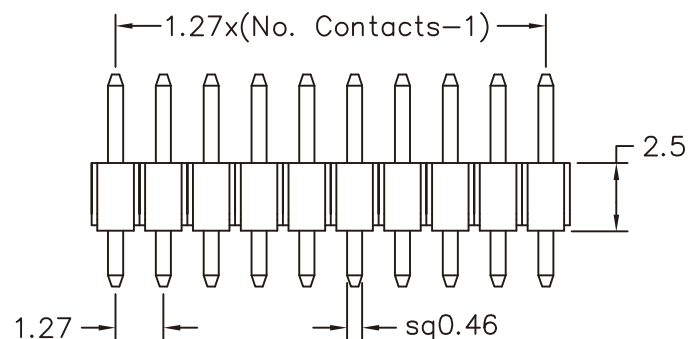
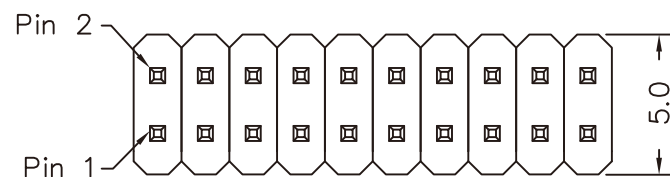


Recommended P.C.B Layout

MATERIAL

Insulator : NYLON 6T

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Operation Temperature : -55°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.15
.XXX ±
ANG ± 3°



ORDER INFORMATION

P-D25xxyy-2Xxx-LF
SERIES | DIP | LEADFREE
DIP180° | 20:2.0mm | 2X02:04WAY
BASE 2.5mm | CONTACT | 2X50:100WAY
28:2.8mm

DESCRIPTION: PIN HEADER 1.27*2.54mm STRAIGHT TYPE, DUAL ROWS