
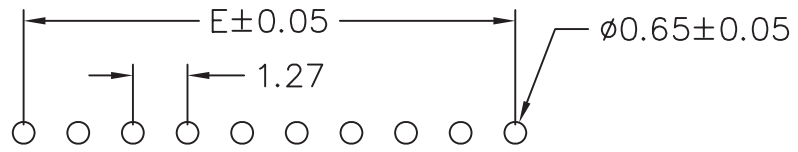



MATERIAL

Insulator : NYLON 6T
 Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Operation Temperature : -55°C to + 105°C

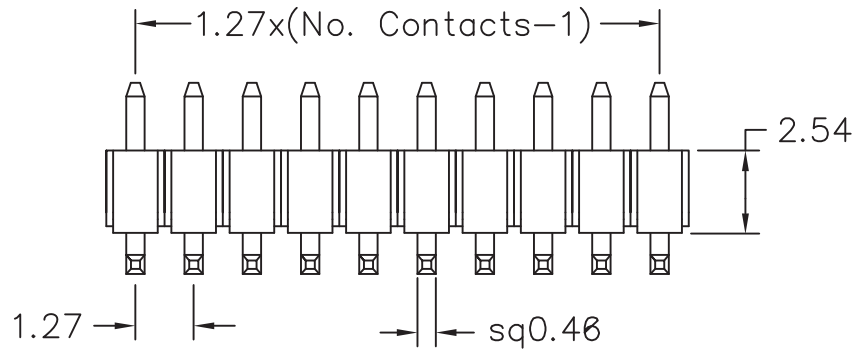


Recommended P.C.B Layout

RoHS Compliant




www.morethanall.com

DRAWING BY CY		TOLERANCES ARE X. ± .X ± 0.30 .XX ± 0.20 .XXX ± ANG ± 3°
CHECKED BY GENIUS		
UNIT/mm	SCALE 1:1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

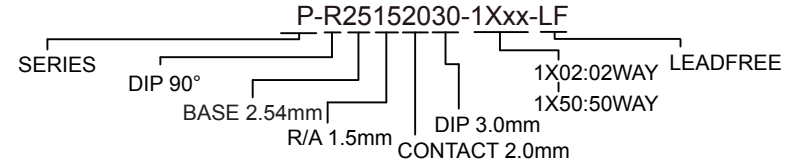

DESCRIPTION: PIN HEADER 1.27*2.54mm
 RIGHT ANGLE TYPE, DUAL ROWS