

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F




E

D

C

B

A

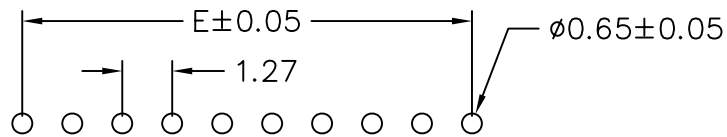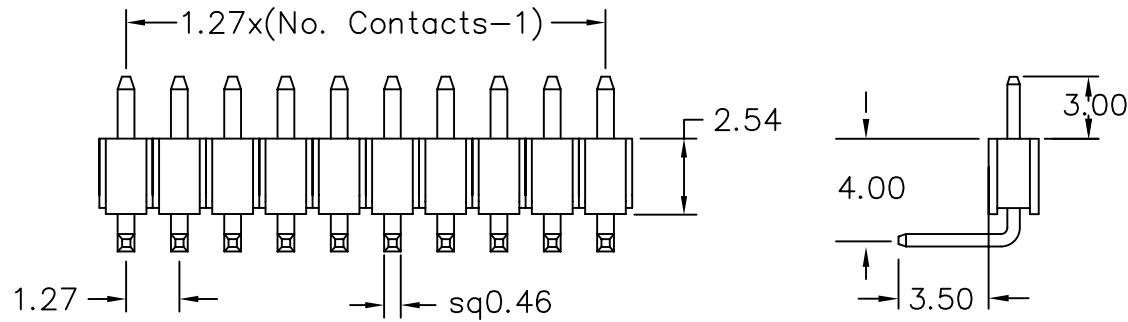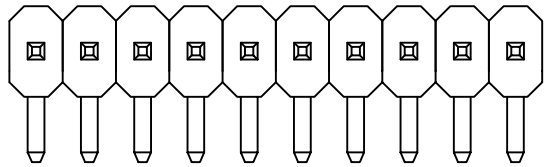

Recommended P.C.B Layout

MATERIAL

Insulator : NYLON 6T
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Operation Temperature : -55°C to + 105°C

P-R3035-1Xxx-LF

LEADFREE

RoHS Compliant



PART NO. P-R3035-1Xxx

DWG NO. P-R3035-1Xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.0 = ±.30
.00 = ±.20
.000 = ±.XXX
.0000 = ±.
ANG. = ±3°

DESCRIPTION:

PIN HEADER 1.27*2.54mm
RIGHT ANGLE TYPE

AREA

REVISIONS

HK

DATE

焯倫股份有限公司