

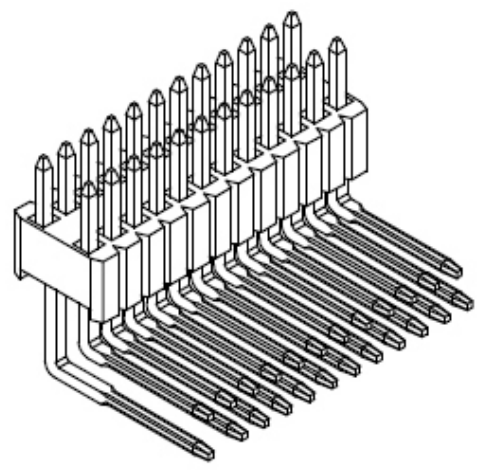


SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: Polyester,UL 94V-0
 ©Standard:Nylon-6T
 Finish: Tin,Gold or Duplex plated
 ©Standard: Duplex plated
 ©Note:
 Duplex plating: gold plated on contact area,
 Tin on solder area

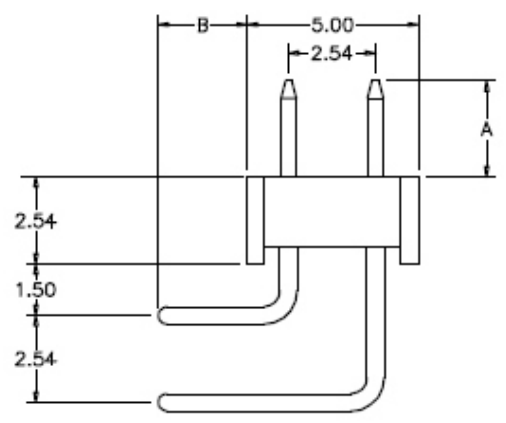

P-R6026SG-2Xxx
 60:6.0mm CONTACT 2.6mm DIP SG:SEMIGOLD

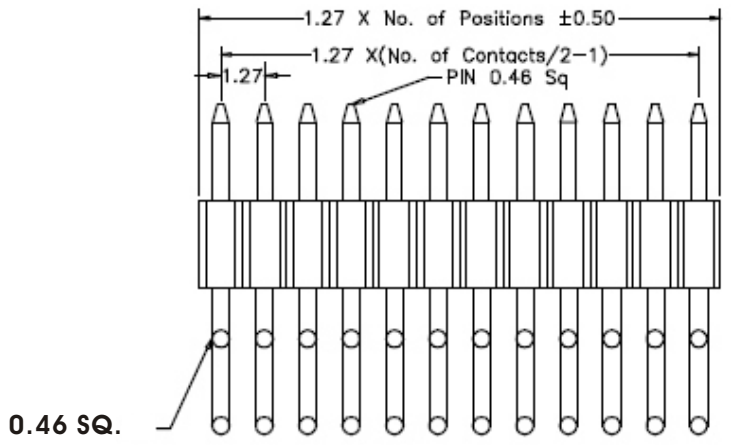

PART NO. **P-R6026SG-2Xxx**

DWG NO. **P-R6026SG-2Xxx**

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
.XX ±
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION