

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC/DC



Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Copper Alloy

Insulation Material: Polyester, UL 94V-0
Nylon 6T

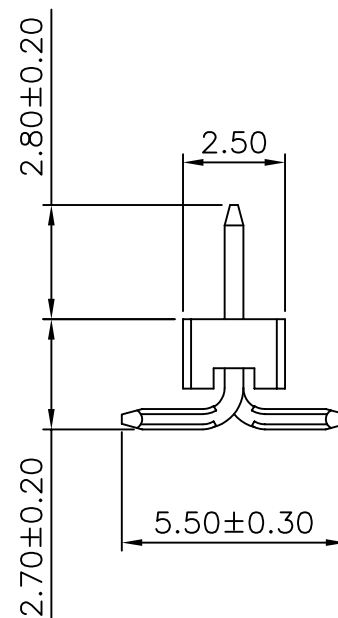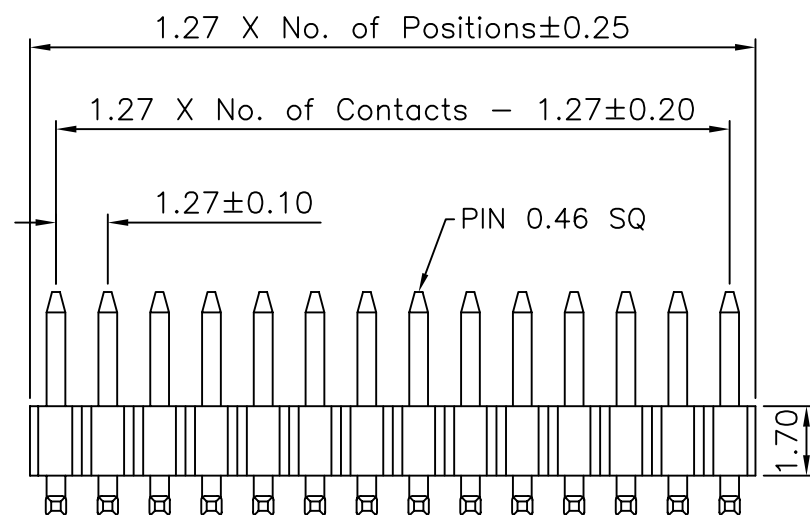

RECOMMENDED P.C.B LAYOUT

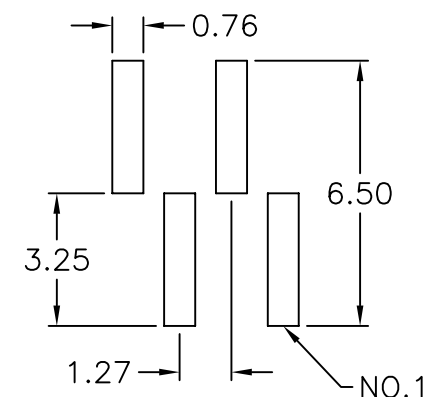

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

照片框

ORDER INFORMATION

P-V27X28-1XxxR-LF
SERIES
180°SMT
HIGH 2.7mm
CONTACT 2.8mm
NON POST
LEADFREE
R TYPE FOOT POSITION
1X02:02WAY
1X50:50WAY

DESCRIPTION: 1.27 PIN HEADER SINGLE ROW SMT TYPE BASE 1.70H