

Specifications

Current Rating: 1Amp

Insulation Resistance: 100MΩ Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20mΩ Max.


Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy

Insulation Material: Polyester, UL 94V-0
Nylon 6T

Recommended P.C.Board Layout

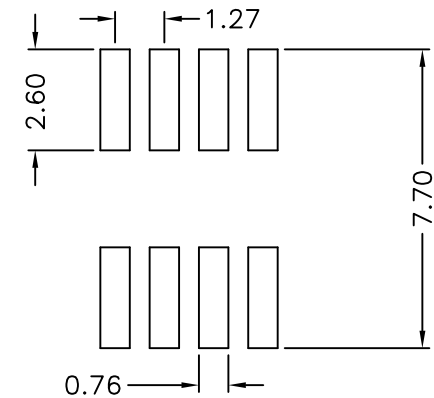

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

P PROJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

照片框

ORDER INFORMATION

P-V30X30-2X05-LF
SERIES | LEADFREE
10 WAY
CONTACT 3.0mm
NON POST
HIGH 3.0mm
180°SMT

DESCRIPTION: PITCH 1.27X2.50 DUAL ROW 28P 1.70H - SMT

煜倫股份有限公司

www.morethanall.com