


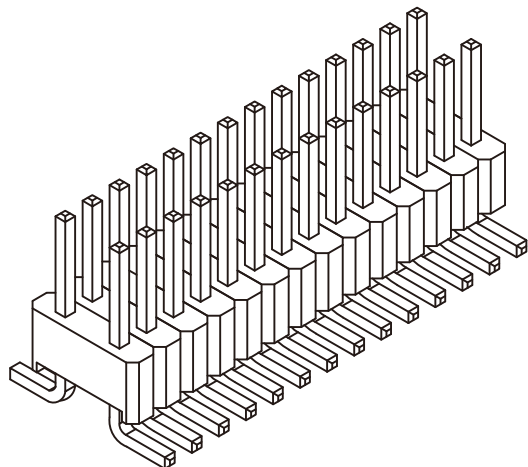


Conteract:

Contact:Brass.



Insuiator:Nylon 6T.

Finish:Gold flash plated over nickel.

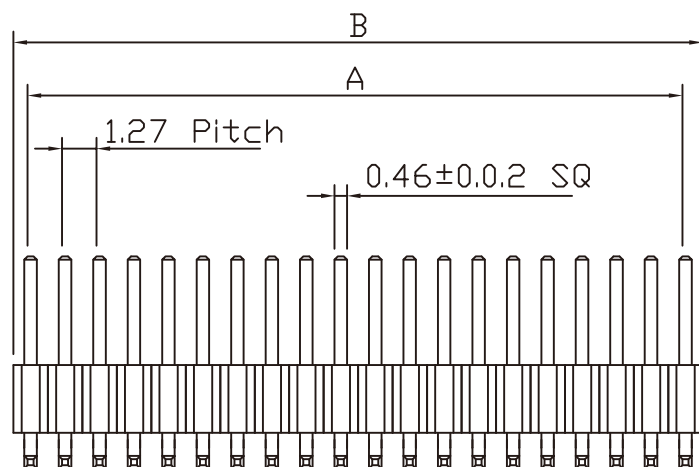

$A = 1.27 \times (\text{NO of Spaces} - 1)$

$B = A + 1.27 \pm 0.3$

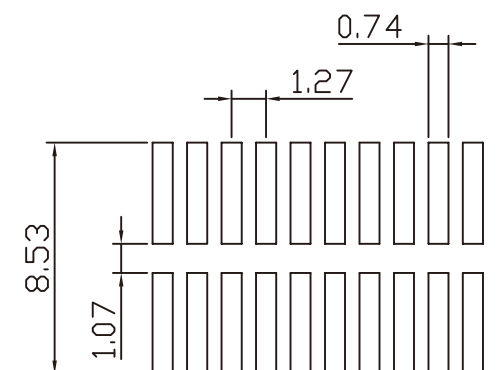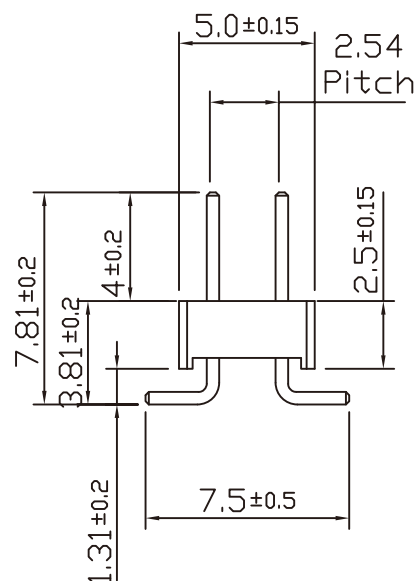

P.C.Board Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PJECTION



ORDER INFORMATION

P-V38X40-2Xxx-LF

SERIES
180°SMT
NON POST
HIGH 3.81mm
LEADFREE
2X02:04WAY
2X50:100WAY
CONTACT 4.0mm

DESCRIPTION: 1.27X2.54 PIN HEADER SMT DUAL ROW