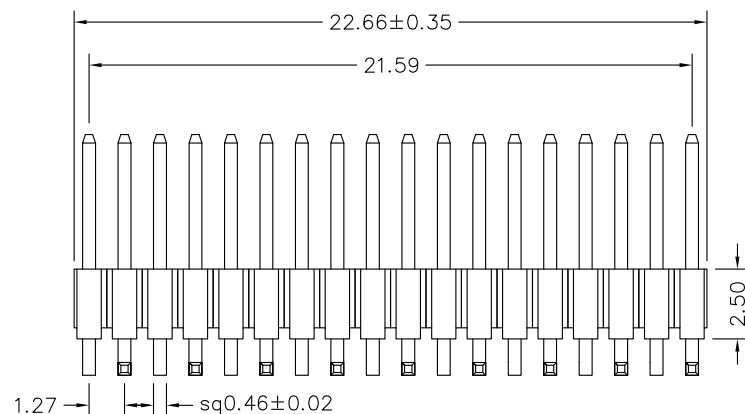
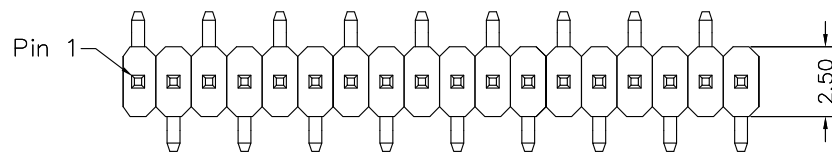


Recommended P.C.B Layout

MATERIAL

Insulator: NY6T UL94-V0

Contact Pin : Brass

SPECIFICATION

Current Rate : 3.6 AMP PER PIN (26AWG)


Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operating Temperature: -40°C to +105°C

Plated: Gold-Flash



照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

ORDER INFORMATION

P-V38X48-1X18R-LF
SERIES 180°SMT
CONTACT 4.8mm
NON POST
HIGH 3.8mm
LEADFREE
R TYPE FOOT
18 WAY

DESCRIPTION: PIN HEADER 1.27*2.54mm SMT S/T TYPE, BOX