

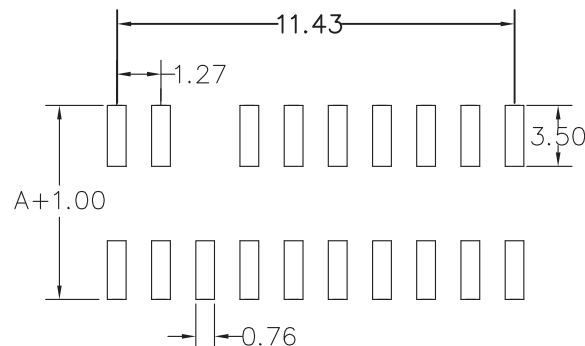
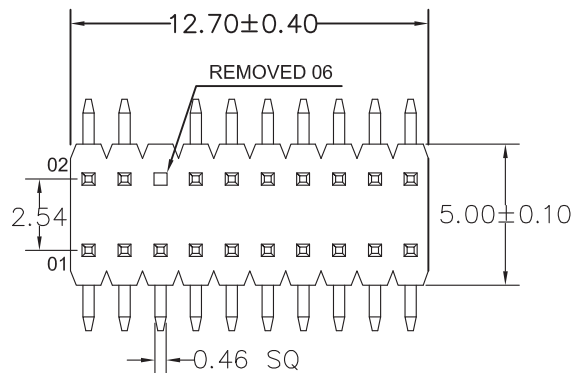


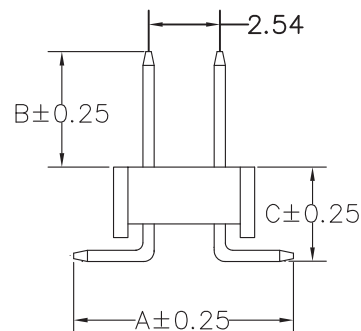

RECOMMENDED P.C.B LAYOUT

MATERIAL
HOUSING : NYLON 6T,UL94V-0
CONTACT : COPPER ALLOYS
PLATED : GOLD-FLASH
COLOR : BLACK

SPECIFICATION
CURRENT: 1A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 5000 MEGAOHMS MIN
DIELECTRIC STRENGTH : 1000 VAC MIN

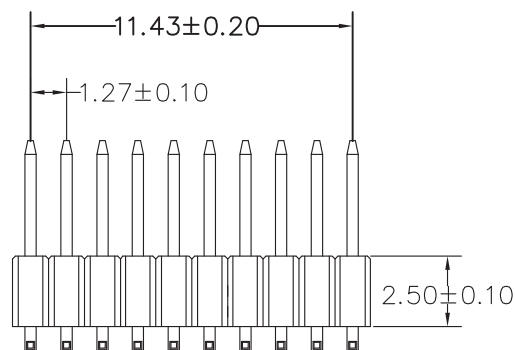

A: 7.50 mm B: 4.80 mm C: 3.80 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

P-V38X48-2X10E6-LF
 SERIES 180°SMT
 20 WAY
 CONTACT 4.8mm
 NON POST
 HIGH 3.8mm
 LEADFREE
 EMPTY #6

DESCRIPTION: PIN HEADER 1.27X2.54 SMT H:2.50