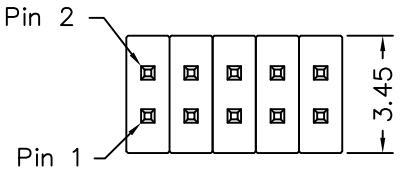

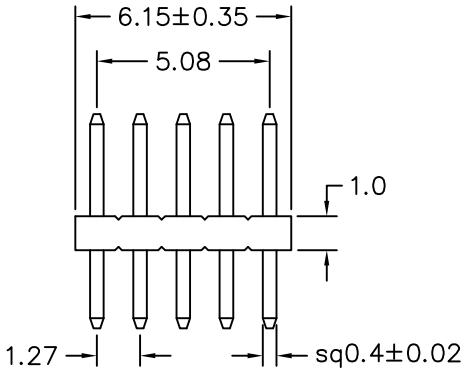



MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Ⓓ Dielectric Voltage : AC 500V for one minute
Operation Temperature : −40℃ to +105℃

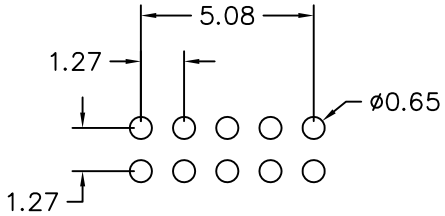

Recommended P.C.B Layout

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ± .X ± 0.30 .XX ± 0.20 .XXX ± ANG ± 3°
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	



ORDER INFORMATION

PA-D103023-2X05-LF

SERIES
DIP 180°
BASE 1.0mm
CONTACT 3.0mm
DIP 2.3mm
10 WAY
LEADFREE

DESCRIPTION: PIN HEADER 1.27*1.27mm STRAIGHT TYPE, DUAL ROWS