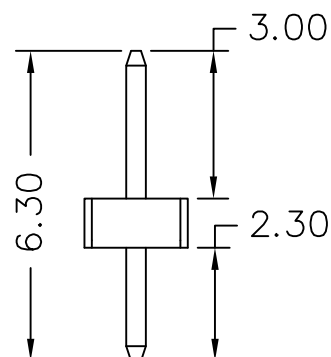
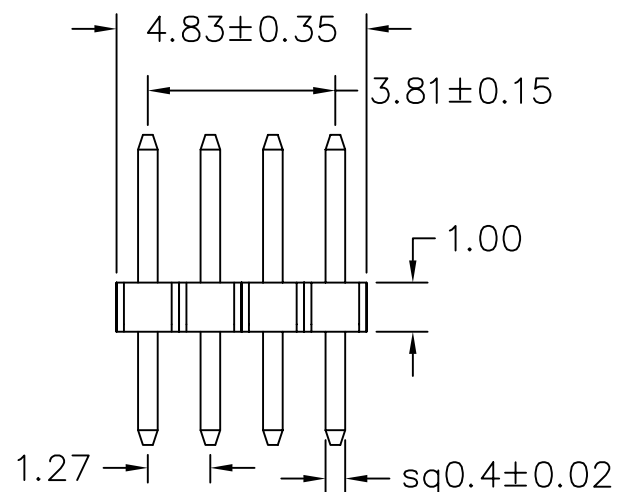
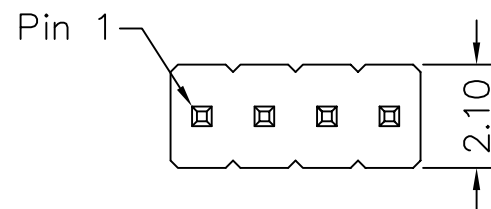


Recommended P.C.B Layout

## MATERIAL

Contact Pin : Brass

## SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

## RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ± 0.30  
.XX ± 0.15  
.XXX ±  
ANG ± 3°

PPOJECTION

照片框

## ORDER INFORMATION

PA-D103023N6T-1X04-LF  
SERIES | CONTACT | 04 WAY | LEADFREE  
DIP 180° | CONTACT 3.0mm | BASE 1.0mm  
NYLON-6T  
DIP 2.3mm

DESCRIPTION: PIN HEADER 1.27\*1.27mm STRAIGHT TYPE, SINGLE ROW