

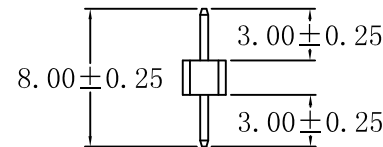


MATERIAL  
 HOUSING : NY6T, UL94V-0  
 CONTACT : COPPER ALLOYS  
 PLATED : GOLD-FLASH  
 COLOR : BLACK

SPECIFICATION  
 CURRENT : 1A  
 OPERATING TEMPERAURE : -40°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN  
 WITHSTAND VOLTAGE : 300 V AC MIN

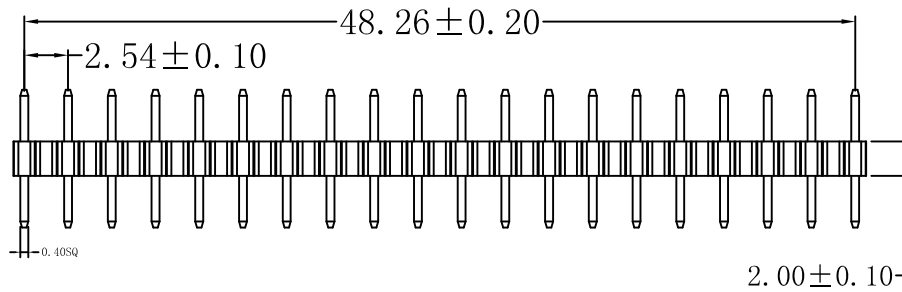

P.C.B. LAYOUT

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司  
 www.morethanall.com

RoHS Compliant


DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4

TOLERANCES ARE  
 X. ±  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ±  
 ANG ± 5°

PJECTION

照片框

ORDER INFORMATION

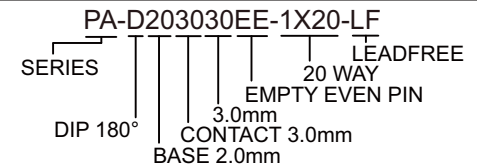

DESCRIPTION: PIN HEADER 1.27PH 180° H:2.0 1×39(N偶数)PIN