

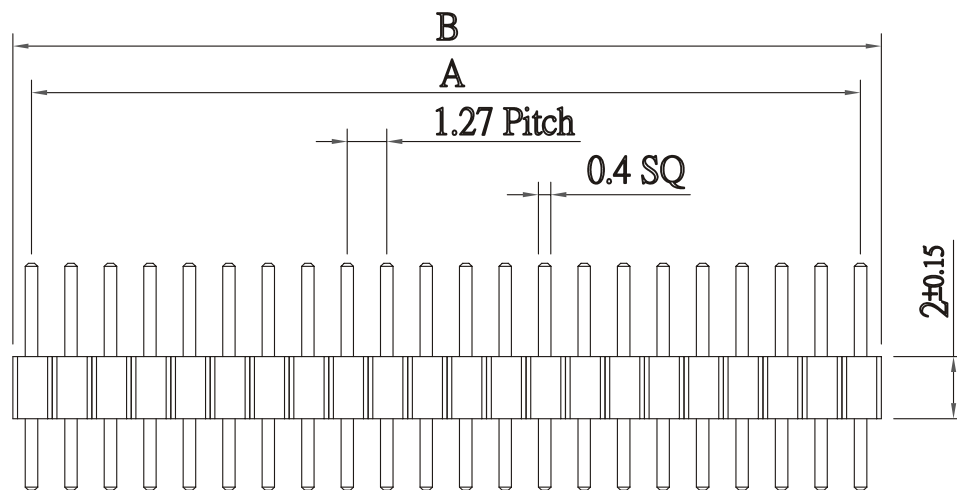
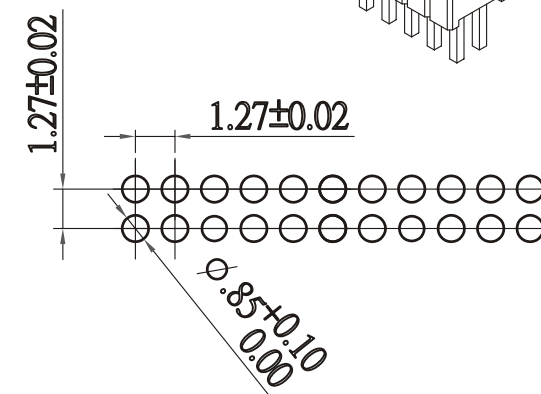


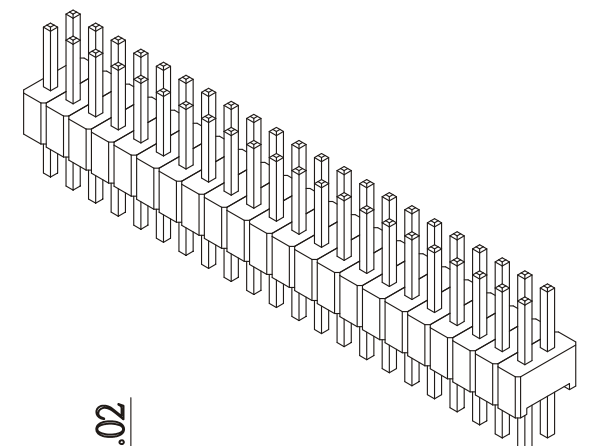

$$A = 1.27 * (\text{NO of Positions} - 1)$$

$$B = A + 1.27 \pm 0.3$$

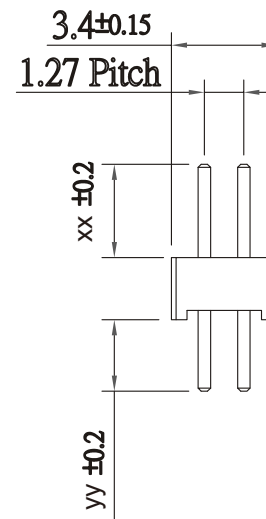

P.C.Board Layout

Contract:

Contact: Brass.

Insulator: Nylon 6T.

Finish: Gold flash plated over nickel.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

PA-D20xxyy-2Xxx-LF

SERIES	CONTACT	LEADFREE
DIP 180°	19:1.9mm	2X02:04WAY
BASE 2.0mm	30:3.0mm	2X50:100WAY
	40:4.0mm	23:2.3mm
		30:3.0mm

DESCRIPTION: 1.27X1.27 PIN HEADER STRAIGHT DUAL ROW