



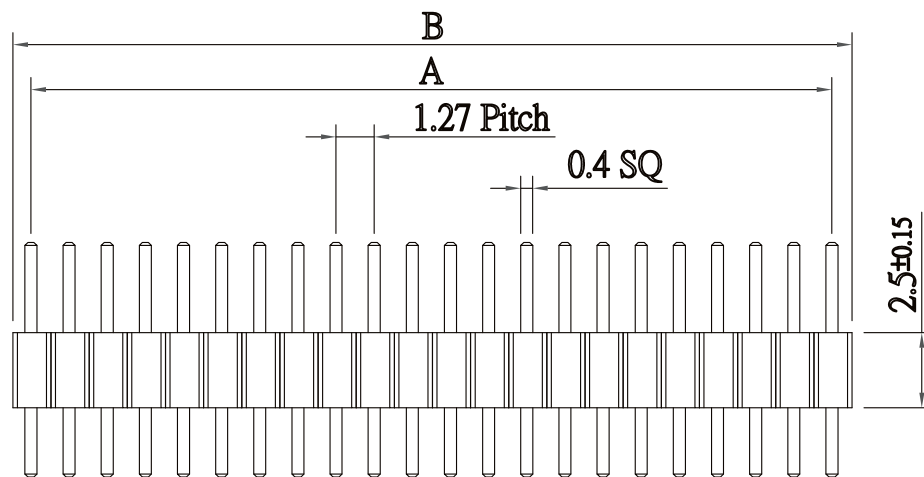

$$A = 1.27 * (\text{NO of Positions} - 1)$$

$$B = A + 1.27 \pm 0.3$$

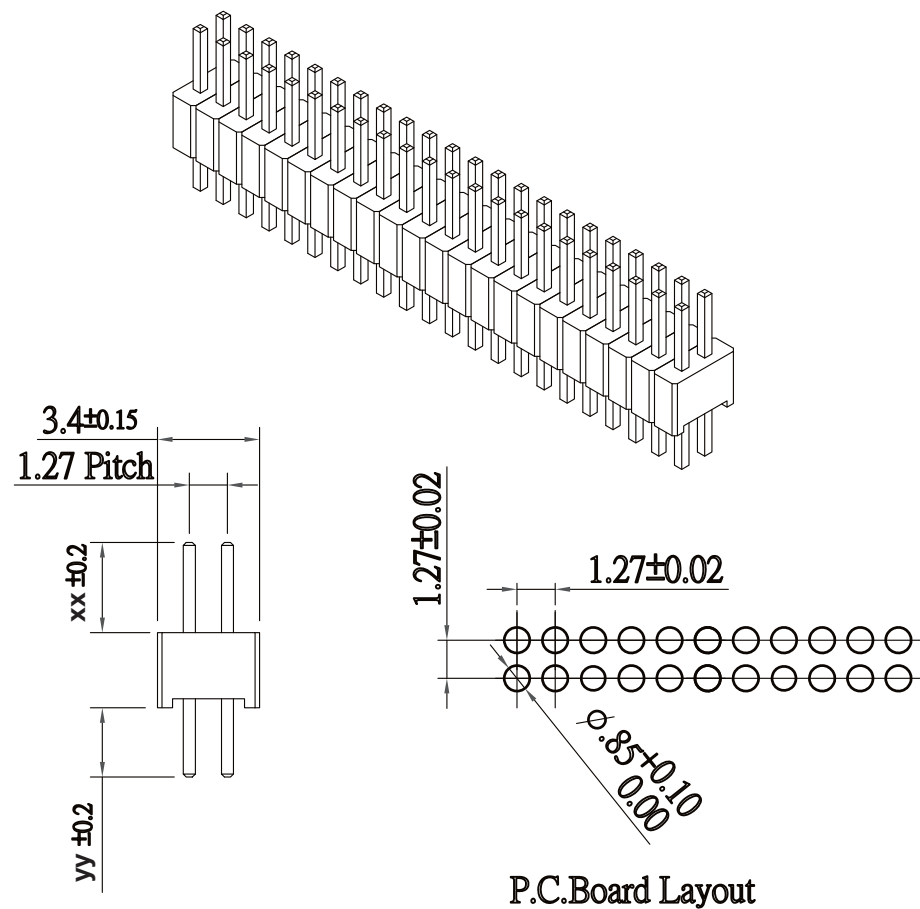

P.C.Board Layout

Contract:

Contact: Brass.

Insulator: Nylon 6T.

Finish: Gold flash plated over nickel.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-D25xxyy-2Xxx-LF
SERIES CONTACT 2X02:04WAY LEADFREE
DIP 180° 30:3.0mm DIP 2X50:100WAY
BASE 2.5mm 23:2.3mm

DESCRIPTION: 1.27X1.27 PIN HEADER STRAIGHT DUAL ROW