

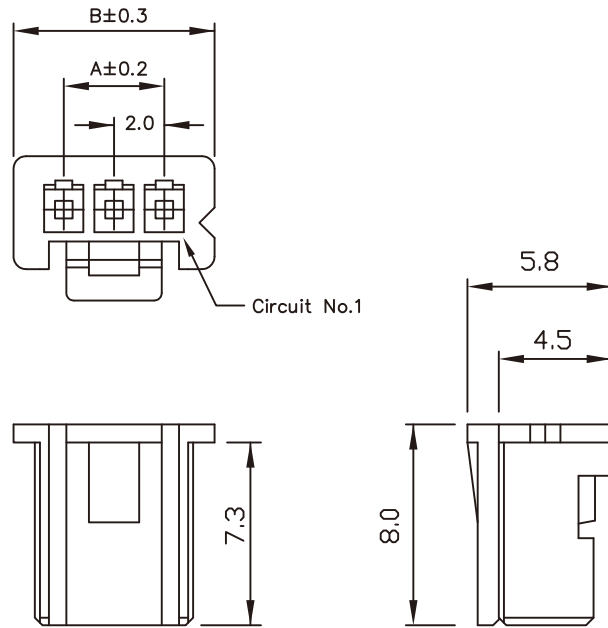


2-4 Pin



Poles	Dimension mm (in.)		Part No.
	A	B	
2	2.0(0.079)	6.0(0.236)	PA-H-02
3	4.0(0.157)	8.0(0.315)	PA-H-03
4	6.0(0.236)	10.0(0.394)	PA-H-04

5-9 Pin

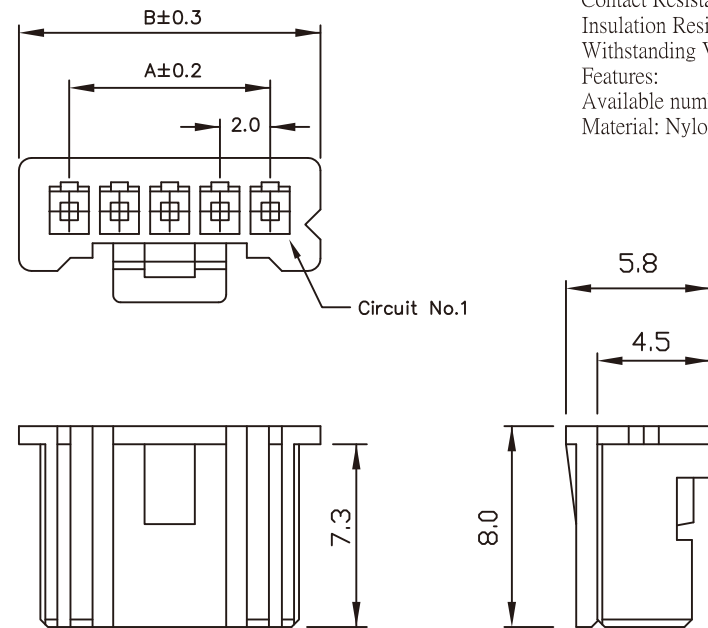

Poles	Dimension mm (in.)		Part No.
	A	B	
5	8.0(0.315)	12.0(0.472)	PA-H-05
6	10.0(0.394)	14.0(0.551)	PA-H-06
7	12.0(0.472)	16.0(0.630)	PA-H-07
8	14.0(0.551)	18.0(0.709)	PA-H-08
9	16.0(0.630)	20.0(0.787)	PA-H-09

Specifications
 Current Rating: 3A AC/ DC (Max)AWG#22
 Voltage Rating: 250V AC/ DC
 Temperature Range: -25°C ~ + 85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage:800V AC/Minute
 Features:
 Available number of circuits:2 to 15 pin
 Material: Nylon 66 UL 94V-0,natural

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION




ORDER INFORMATION

PA-H-xx-LF
 SERIES | LEADFREE
 02~15WAY
 DIP 180°

DESCRIPTION:

10-15 Pin

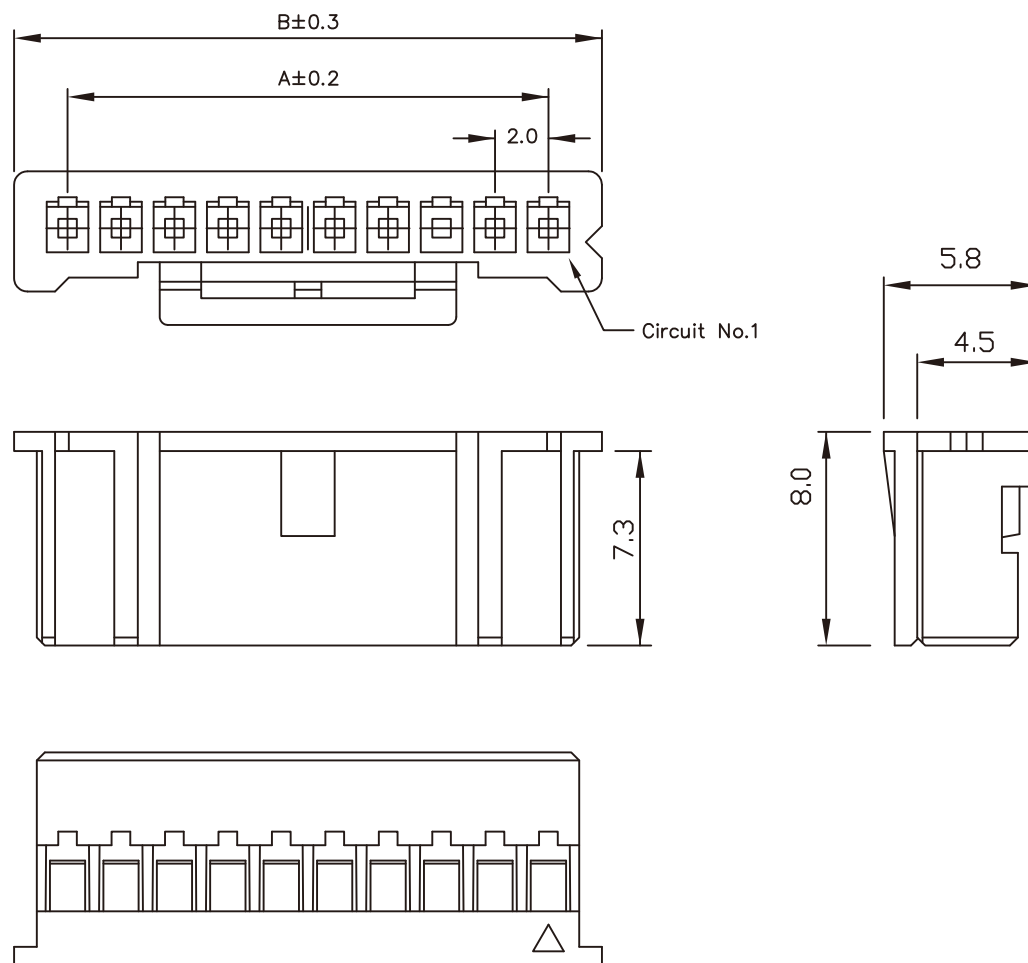

Specifications
 Current Rating: 3A AC/ DC (Max)AWG#22
 Voltage Rating: 250V AC/ DC
 Temperature Range: -25°C ~ + 85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage:800V AC/Minute
 Features:
 Available number of circuits:2 to 15 pin
 Material: Nylon 66 UL 94V-0,natural

Poles	Dimension mm (in.)		Part No.
	A	B	
10	18.0(0.709)	22.0(0.866)	PA-H-10
11	20.0(0.787)	24.0(0.945)	PA-H-11
12	22.0(0.866)	26.0(1.024)	PA-H-12
13	24.0(0.945)	28.0(1.102)	PA-H-13
14	26.0(1.024)	30.0(1.181)	PA-H-14
15	28.0(1.102)	32.0(1.260)	PA-H-15

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION



ORDER INFORMATION

PA-H-xx-LF
 SERIES | LEADFREE
 02~15WAY
 DIP 180°

DESCRIPTION: