


A: 3.20 mm  
 B: 1.20 mm  
 C: 0.90 mm

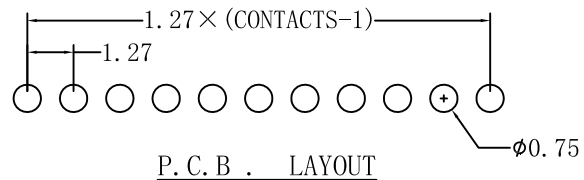

**MATERIAL**

HOUSING : NY6T, UL-94V0  
 CONTACT : COPPER ALLOYS  
 PLATED : GOLD FLASH  
 COLOR : BLACK

**SPECIFICATION**

CURRENT : 1A  
 OPERATING TEMPERAURE : -55° C TO +105° C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN  
 WITHSTAND VOLTAGE : 500 V AC/minute

CONTACTS				
	1×11	1×21	1×31	1×41
1×02	1×12	1×22	1×32	1×42
1×03	1×13	1×23	1×33	1×43
1×04	1×14	1×24	1×34	1×44
1×05	1×15	1×25	1×35	1×45
1×06	1×16	1×26	1×36	1×46
1×07	1×17	1×27	1×37	1×47
1×08	1×18	1×28	1×38	1×48
1×09	1×19	1×29	1×39	1×49
1×10	1×20	1×30	1×40	1×50

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ±  
 ANG ± 5°

P PROJECTION

照片框

**ORDER INFORMATION**

PA-R10093212-1Xxx-LF  
 SERIES | LEADFREE  
 | 1X02:02WAY  
 | 1X50:50WAY  
 DIP 90° | DIP 1.2mm  
 BASE 1.0mm | CONTACT 3.2mm  
 R/A 0.9mm

DESCRIPTION: 1.27PH 90° H: 1.00 1\*XXPIN

煜倫股份有限公司

www.morethanall.com