


RECOMMENDED P.C.B LAYOUT

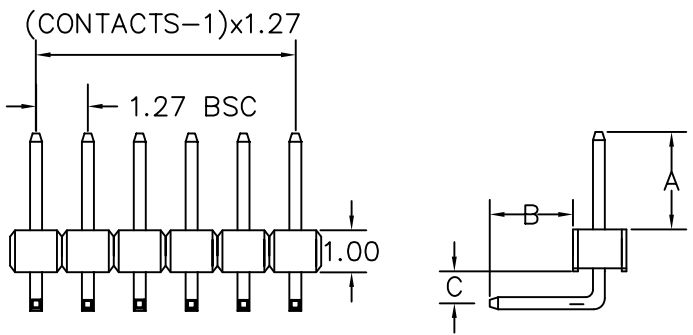

A: 3.00 mm B: 2.30 mm C: 1.00 mm

MATERIAL
 HOUSING : THERMOPLASTIC UL94V-0
 CONTACT : COPPER ALLOYS
SPECIFICATION
 CURRENT: 1A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE: AC 1000V RMS

| | |
|----------|------|
| CONTACTS | 1X26 |
| 1X2 | 1X27 |
| 1X3 | 1X28 |
| 1X4 | 1X29 |
| 1X5 | 1X30 |
| 1X6 | 1X31 |
| 1X7 | 1X32 |
| 1X8 | 1X33 |
| 1X9 | 1X34 |
| 1X10 | 1X35 |
| 1X11 | 1X36 |
| 1X12 | 1X37 |
| 1X13 | 1X38 |
| 1X14 | 1X39 |
| 1X15 | 1X40 |
| 1X16 | 1X41 |
| 1X17 | 1X42 |
| 1X18 | 1X43 |
| 1X19 | 1X44 |
| 1X20 | 1X45 |
| 1X21 | 1X46 |
| 1X22 | 1X47 |
| 1X23 | 1X48 |
| 1X24 | 1X49 |
| 1X25 | 1X50 |

RoHS Compliant



PART NO. PA-R10103023-1Xxx

DWG NO. PA-R10103023-1Xxx

FILE NO.

UNIT / mm SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

| | | | |
|------|-----------|----|------|
| AREA | REVISIONS | HK | DATE |
|------|-----------|----|------|

煜倫股份有限公司