



1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

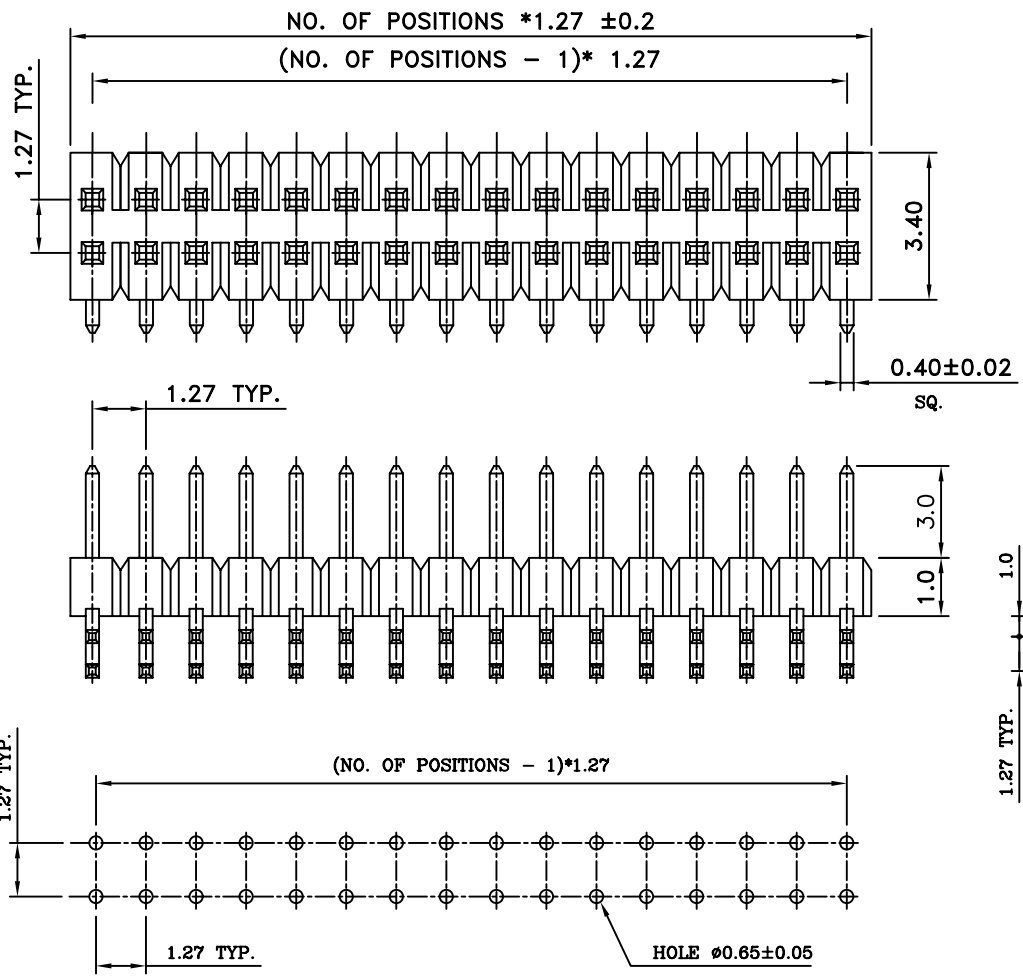

Specifications:
 Current rating: 1 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -25°C ~ +260°C
 Contact resistance: 20mohm max.
 Insulation resistance: 5,000Mohm min.

Materials:
 Insulator: Nylon 6T(UL94V-0)
 Contact material: Phosphor Bronze
 Plating: Gold flash

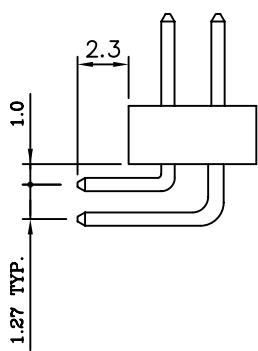

PA-R10103023-2Xxx-LF
 BASE 10:1.0mm
 CONTACT 30:3.0mm
 R/A 10:1.0mm
 LEADFREE
 POSITION PER ROW
 DIP 23:2.3mm

RoHS Compliant

RECOMMENDED P.C.BOARD LAYOUT



PART NO. PA-R10103023-2Xxx		CHECKED BY CY		TOLERANCES ARE		DESCRIPTION: 1.27x1.27MM PIN HEADER	
DWG NO. PA-R10103023-2Xxx		DRAWING BY		.X ±0.2 .XX ±0.15 .XXX AWG		AREA	
FILE NO.		PROJECTION				REVISIONS	
UNIT / mm	SCALE 1:1					HK	DATE

焯倫股份有限公司