



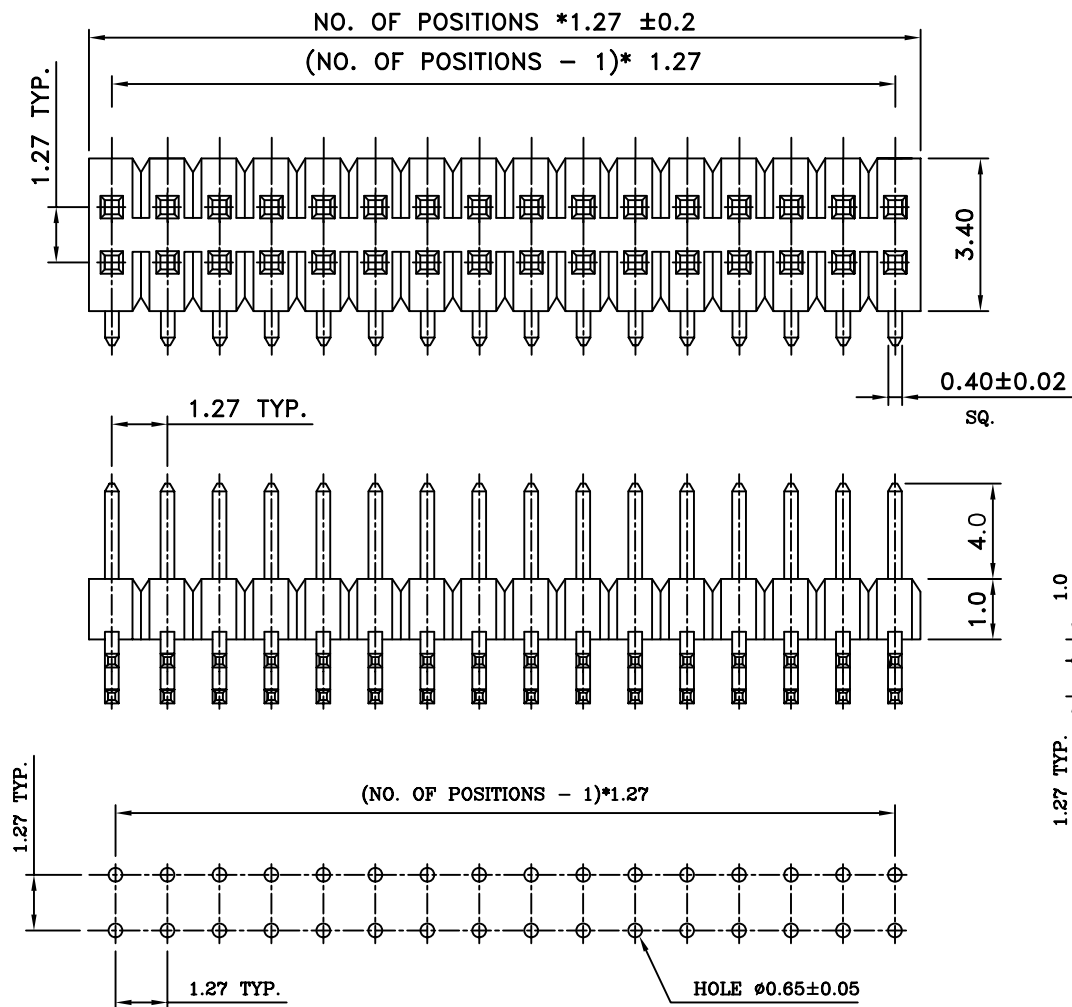

Specifications:
 Current rating: 1 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -25°C ~ +260°C
 Contact resistance: 20mohm max.
 Insulation resistance: 5,000Mohm min.

Materials:
 Insulator: Nylon 6T(UL94V-0)
 Contact material: Phosphor Bronze
 Plating: Gold flash

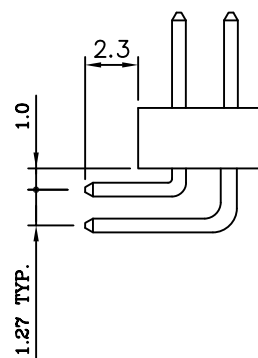

RECOMMENDED P.C.BOARD LAYOUT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-R10104023-2Xxx-LF
 SERIES | DIP 90° | CONTACT 4.0mm | BASE 1.0mm | DIP 2.3mm | R/A 1.0mm | LEADFREE | 2X02:04WAY | 2X50:100WAY

DESCRIPTION: 1.27x1.27MM PIN HEADER