

**MATERIAL**

Contact Pin : Brass




**SPECIFICATION**

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

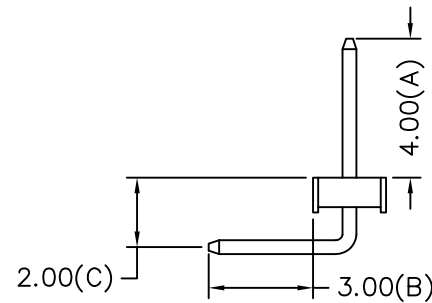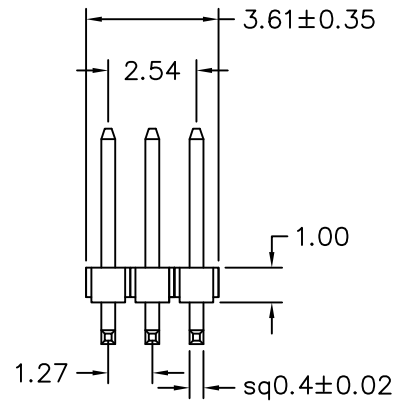

Recommended P.C.B Layout

PA-R10104030-1X03-LF  
LEADFREE

RoHS Compliant



PART NO. PA-R10104030-1X03

DWG NO. PA-R10104030-1X03

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

PIN HEADER 1.27\*1.27mm  
RIGHT ANGLE TYPE, SINGLE ROW

FILE NO.

DRAWING BY

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 0.30

AREA

REVISIONS

HK

DATE

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

