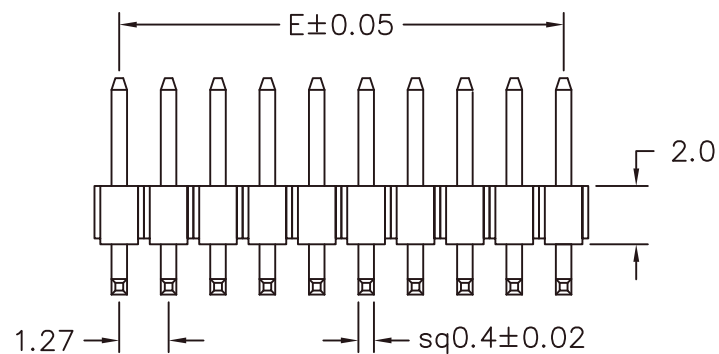
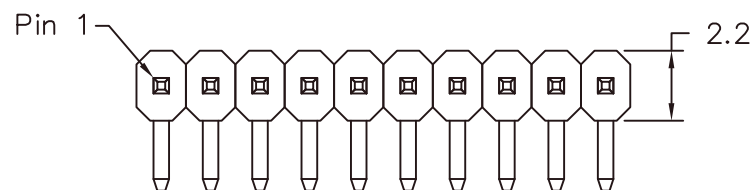


Recommended P.C.B Layout

MATERIAL

Insulator : NYLON 46

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

POLES	DIM E	POLES	DIM E
		18	21.59
2	1.27	19	22.86
3	2.54	20	24.13
4	3.81	21	25.40
5	5.08	22	26.67
6	6.35	23	27.94
7	7.62	24	29.21
8	8.89	25	30.48
9	10.16	26	31.75
10	11.43	27	33.02
11	12.70	28	34.29
12	13.97	29	35.56
13	15.24	30	36.83
14	16.51	31	38.10
15	17.78	32	39.37
16	19.05	33	40.64
17	20.32		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

X. ±
.X ± 0.30
.XX ± 0.15
.XXX ±
ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

PA-R20103030-1Xxx-LF
SERIES
DIP 90°
BASE 2.0mm
R/A 1.0mm
LEADFREE
1X02:02WAY
1X50:50WAY
DIP3.0mm
CONTACT3.0mm

DESCRIPTION: PIN HEADER 1.27*1.27mm RIGHT ANGLE TYPE, SINGLE ROW