
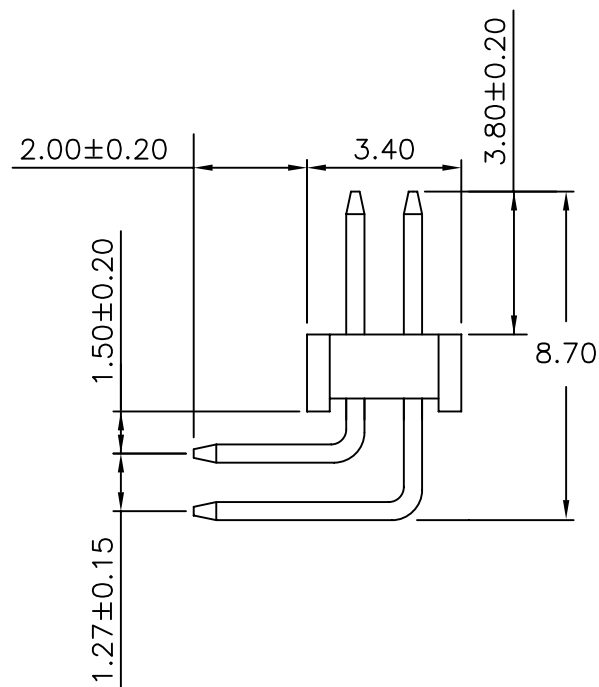
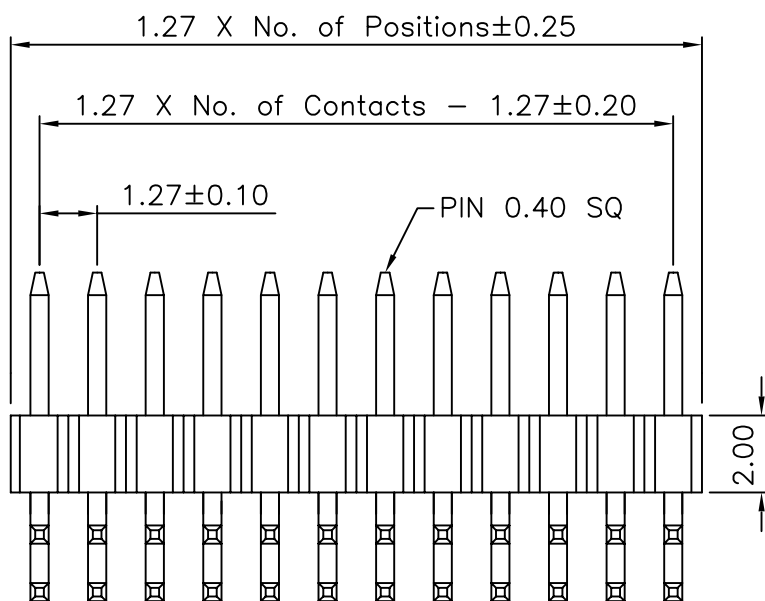


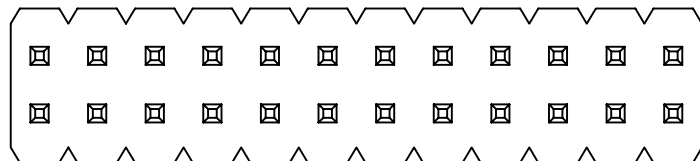

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Copper Alloy

Insulation Material: Polyester, UL 94V-0
Nylon 6T

Recommend I

Hole Layout P.C.Board



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-R20153820-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X50:100WAY
DIP 90°
BASE 2.0mm
CONTACT 3.8mm
R/A 1.5mm

DESCRIPTION: 1.27 PIN HEADER DUAL ROWS (R/A) TYPE BASE 1.7H