
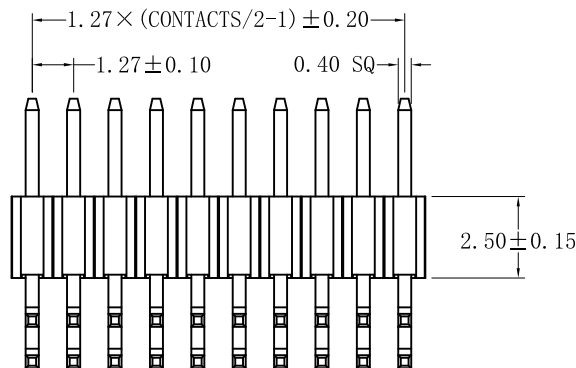
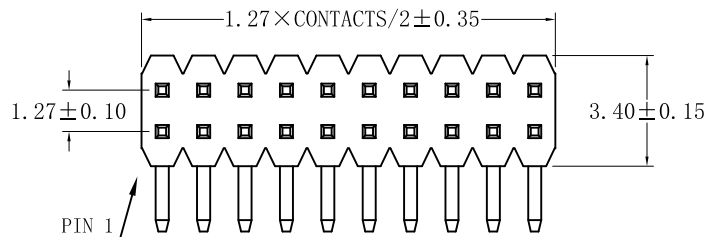


P. C. B . LAYOUT

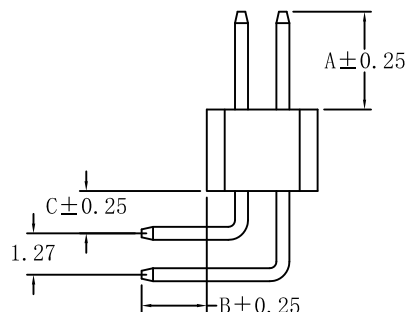

A: 4.00 mm

B: 2.30 mm

C: 0.50 mm

MATERIAL

HOUSING : NY6T, UL-94V0

COLOR : BLACK

CONTACT : BRASS

PLATED : GOLD-FLASH

SPECIFICATION

CURRENT : 1A

OPERATING TEMPERAURE : -55° C TO +105° C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE: 1000 MEGAOHMS MIN

WITHSTAND VOLTAGE : 500 V AC/minute

CONTACTS

	2×12	2×25	2×38
	2×13	2×26	2×39
	2×14	2×27	2×40
2×02	2×15	2×28	2×41
2×03	2×16	2×29	2×42
2×04	2×17	2×30	2×43
2×05	2×18	2×31	2×44
2×06	2×19	2×32	2×45
2×07	2×20	2×33	2×46
2×08	2×21	2×34	2×47
2×09	2×22	2×35	2×48
2×10	2×23	2×36	2×49
2×11	2×24	2×37	2×50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

PA-R25054023-2Xxx-LF
SERIES
DIP 90°
BASE 2.5mm
LEADFREE
2X02:04WAY
2X50:100WAY
DIP 2.3mm
CONTACT 4.0mm
R/A 0.5mm

DESCRIPTION: