

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F




E

D

C

B

A

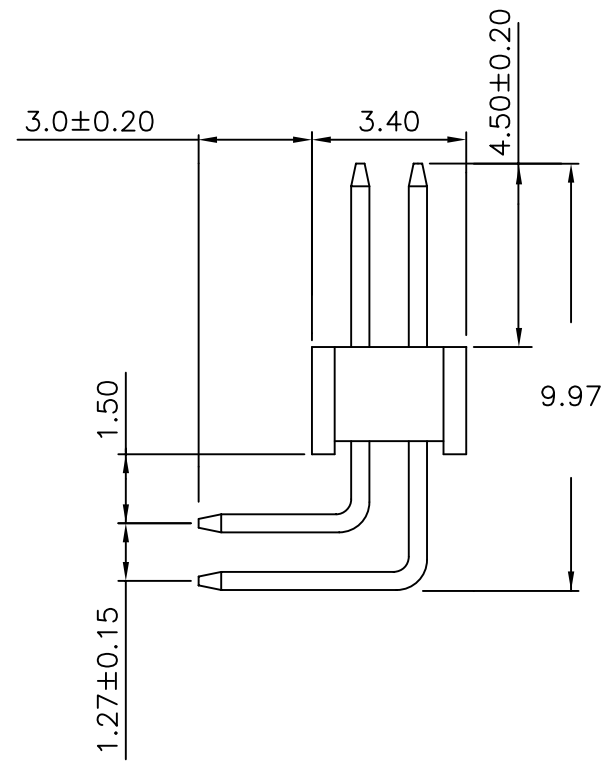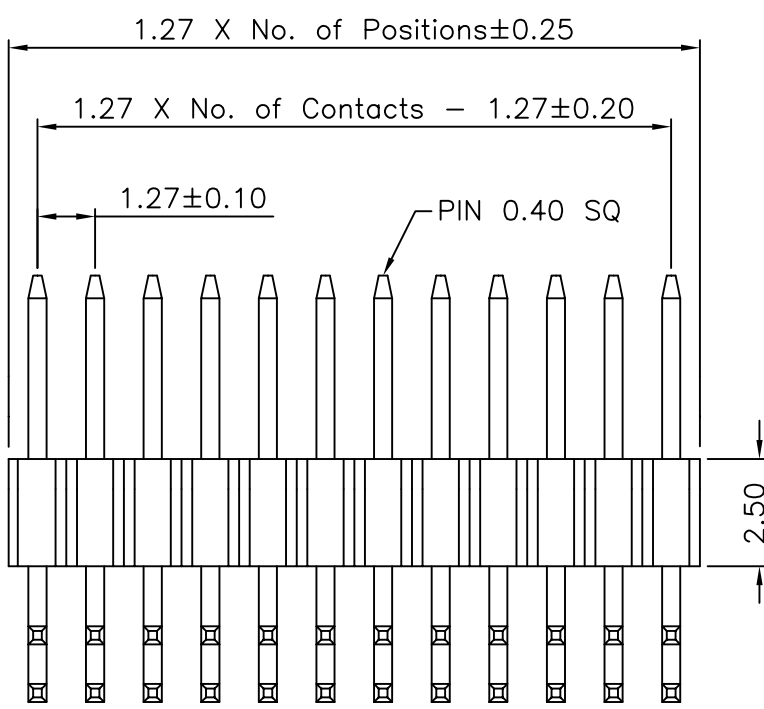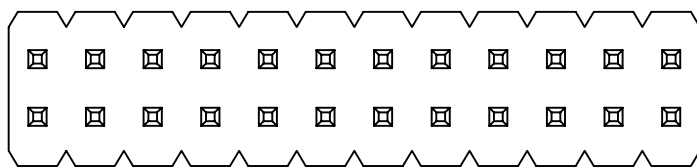

Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T

PA-R254530-2Xxx-LF
 LEADFREE

RoHS Compliant

Recommended P.C.Board
 Hole Layout



PART NO. PA-R254530-2Xxx

DWG NO. PA-R254530-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 AWG

DESCRIP TION:	1.27 PIN HEADER DUAL ROWS (R/A) TYPE BASE 1.7H			
AREA	REVISIONS	HK	DATE	

煜倫股份有限公司