
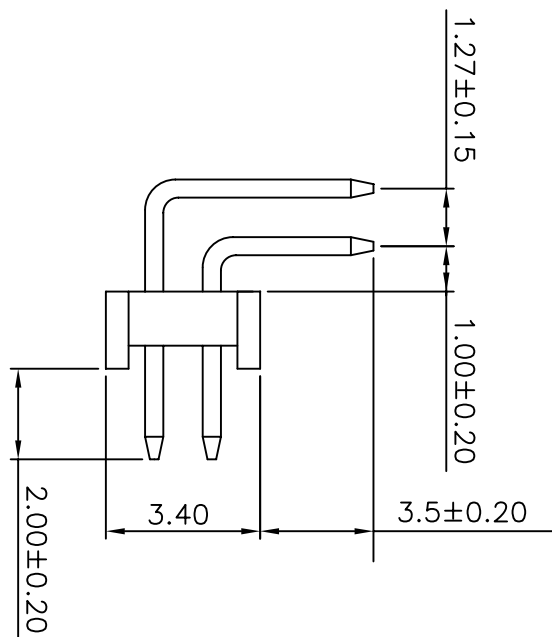
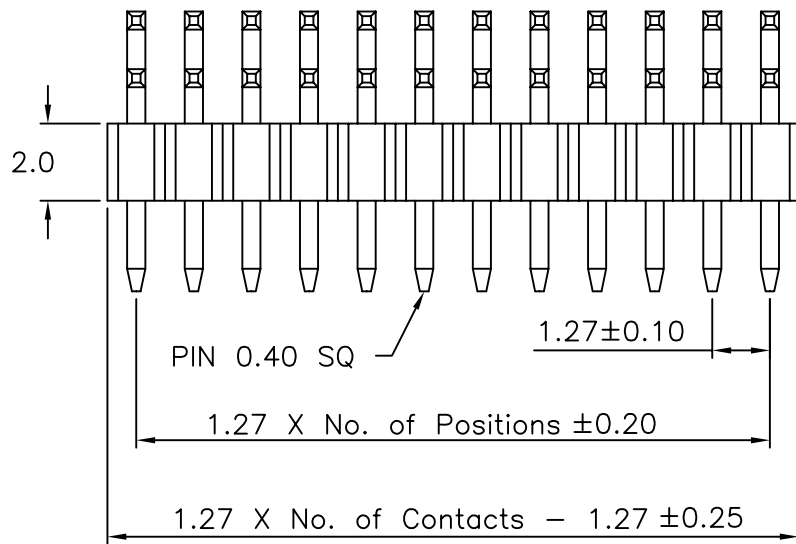


1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

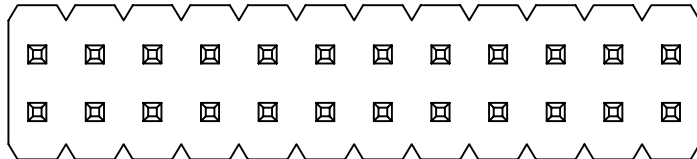


Specifications

Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 300V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T

Recommended P.C.Board  
 Hole Layout



PART NO. PA-RH201035-2Xxx

DWG NO. PA-RH201035-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ± 0.13  
 AWG

DESCRIP TION:  
 AREA

REVISIONS

HK

DATE

1.27 PIN HEADER DUAL ROWS (R/A) TYPE BASE 1.7H

煜倫股份有限公司