

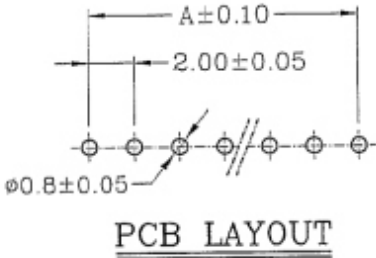
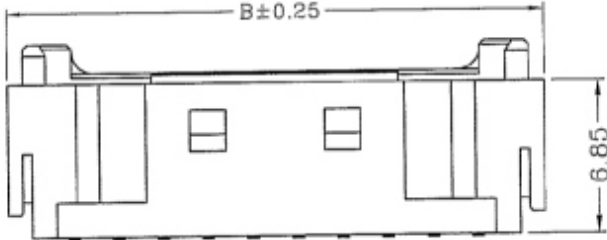
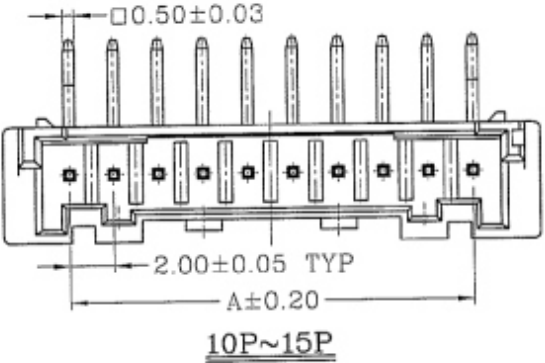





Material: * Insulator: Thermal Plasticity Resin UL 94V-0
* Contact: Brass, Tin Plated



Dimensional & Ordering Information:

Circuits	Dimensions		Pcs/Bag
	A	B	
2	—	8.0	1000
3	4.0	10.0	1000
4	6.0	12.0	1000
5	8.0	14.0	1000
6	10.0	16.0	1000
7	12.0	18.0	500
8	14.0	20.0	500
9	16.0	22.0	500
10	18.0	24.0	500
11	20.0	26.0	500
12	22.0	28.0	250
13	24.0	30.0	250
14	26.0	32.0	250
15	28.0	34.0	250

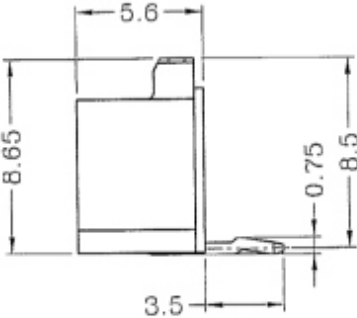

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PA-RX-xx-LF
SERIES | LEADFREE
| 02~15WAY
| NON POST
| DIP 90°

DESCRIPTION: