

APPLICATION AND FEATURES



- 1.Variable pin length, gold or tin plated.
- 2.Mates with P.C.Board connectors

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: $-40^{\circ}\sim+105^{\circ}\text{C}$
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: Polyester,UL 94V-0
 ◎Standard: Nylon-6T

Finish: Gold plated

◎Standard: Gold flash all over

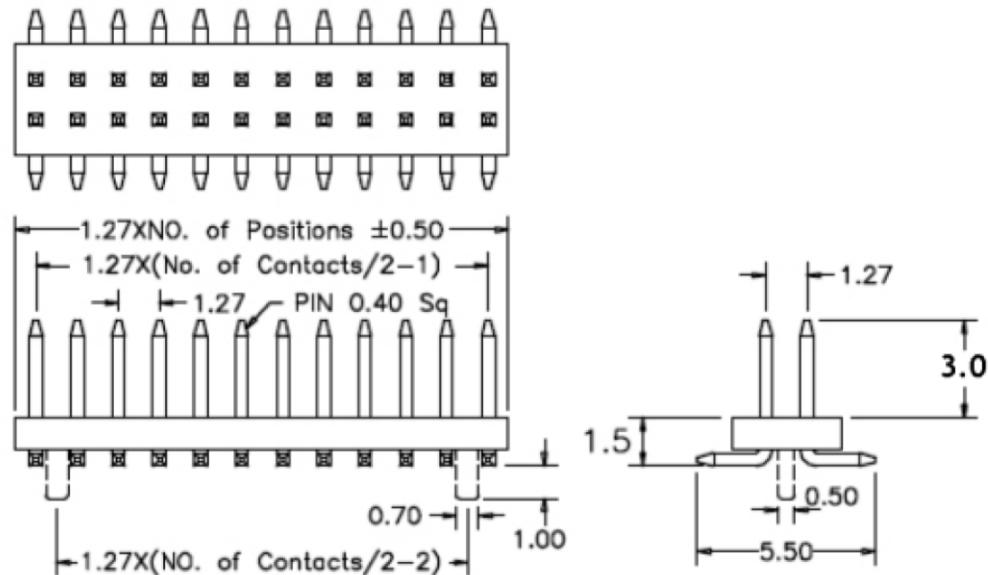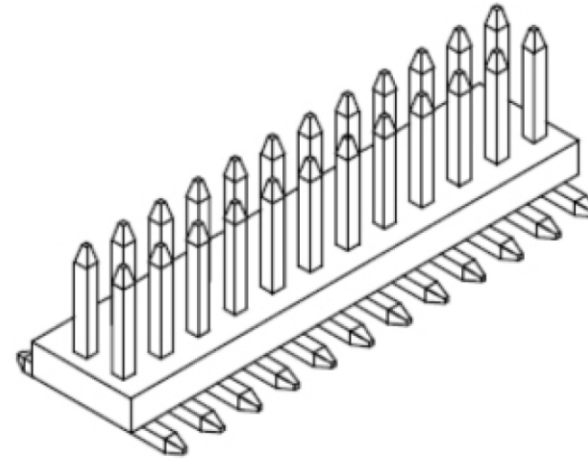

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

PA-V15P30-2Xxx-LF
 SERIES | LEADFREE
 2X02:04WAY
 2X50:100WAY
 180°SMT | CONTACT 3.0mm
 POST
 HIGH 1.5mm

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±