

MATERIAL

Contact Pin : Brass




SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

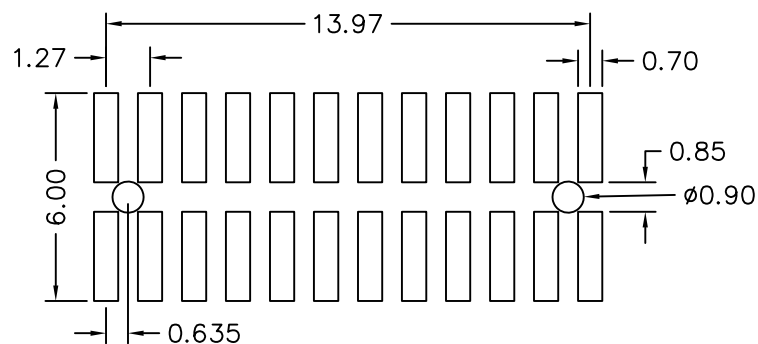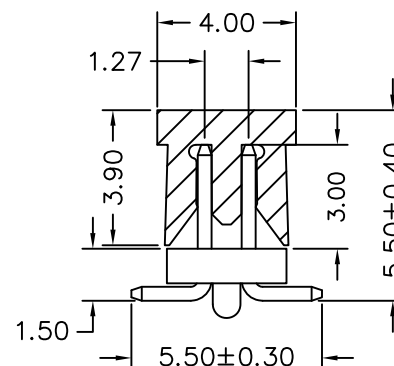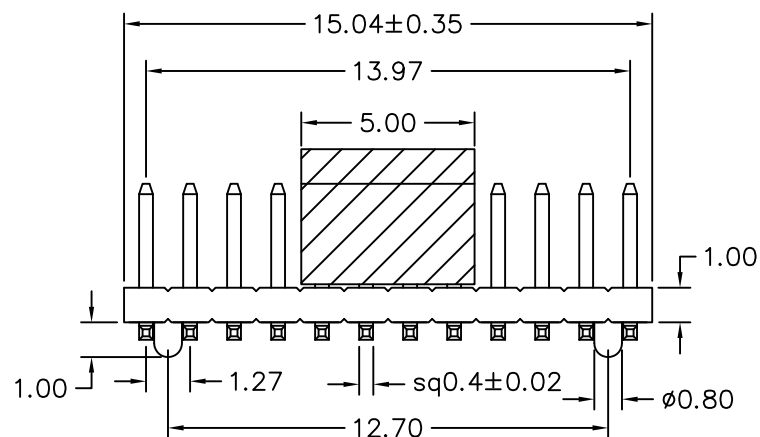

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. $\pm$

CHECKED BY GENIUS

.X $\pm$ 0.30

UNIT / mm

SCALE 1 : 1

.XX $\pm$ 0.15

DATE

.XXX $\pm$

ANG $\pm$ 3°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

PA-V15P30-2X12-LF
SERIES
LEADFREE
24 WAY
CONTACT 3.0mm
POST
HIGH 1.5mm
180°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PIN HEADER 1.27*1.27mm SMT S/T TYPE, DUAL ROWS CAP+TUBE